



Operation and Safety Guide

Carpet Blower
Model # F514

Vendor Website: HD.drieaz.com

Support Phone No. 1-800-932-3030

⚠ WARNING

SAFETY TOPICS:

Read and understand manual before use.

Please visit HD.drieaz.com



SAFETY CHECKLIST:

FIRE AND ELECTRIC SHOCK HAZARD

1. Unit must be electrically grounded.
2. Insert 3-prong plug on power cord directly into matching grounded receptacle.
3. Do not use with an adapter.
4. Do not use with an extension cord.
5. Inspect power cord before use. Never operate with damaged power cord.




WARNING

1. Keep wiring and motor dry.
2. Do not operate in standing water.
3. If electrical components become wet, allow them to dry completely before using.



Tool Application: The 3-speed Carpet Blower accelerates the evaporation of moisture from materials. Position flat to dry floors, or tip back to dry a wall. Position on its back to blow air up to dry ceilings.

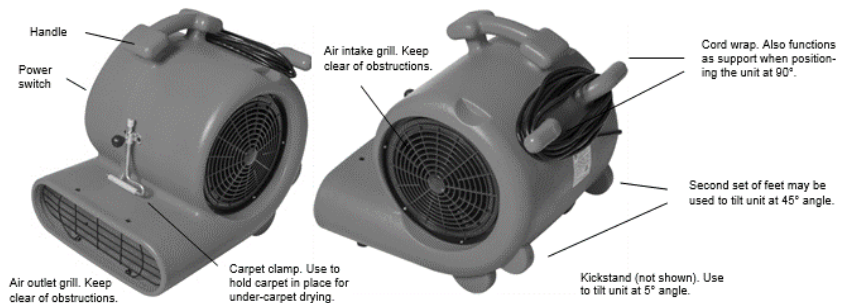

Tool Operation:

Step	Action
1	Unwrap the cord wrap completely.
2	Place the Carpet Blower with the outlet directed at damp area.
3	Plug the unit into a standard 115V grounded outlet. Each Carpet Blower needs 5 amps to operate on high (3 amps on low; 3.5 amps on medium).
4	To switch the unit on, rotate the switch to the speed desired.
5	The Carpet Blower can be operated flat or at 5° (with kickstand), 45° and 90°.
6	For maximum performance, make sure nothing is blocking or restricting the side inlet grill.
7	When finished, turn switch off, unplug unit, and completely wrap cord around back cord wrap.