



Operation and Safety Guide

Portable Water Extractor
Model # F561

Vendor Website: HD.drieaz.com

Support Phone No. 1-800-932-3030

WARNING



SAFETY TOPICS:

Read and understand manual before use.

Please visit HD.drieaz.com

SAFETY CHECKLIST: FIRE AND ELECTRIC SHOCK HAZARD




1. Unit must be electrically grounded.
2. Insert 3-prong plug on power cord directly into matching grounded receptacle.
3. Do not use with an adapter.
4. Do not use with an extension cord.
5. Inspect power cord before use. Never operate with damaged power cord.



WARNING

1. Keep wiring and motor dry.
2. Do not expose to rain, snow or water.
3. Do not operate in standing water.
4. If electrical components become wet, allow them to dry completely before using.

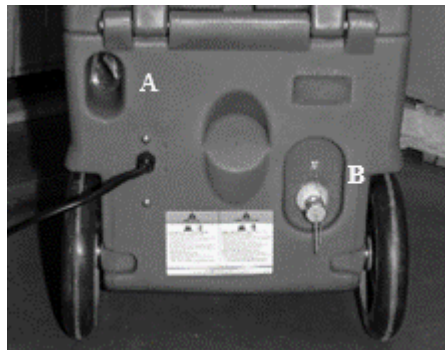

A – Vacuum exhaust. Keep clear.
B – Auto-pumpout outlet. Keep capped when hose is not attached.



SWITCH POSITIONS
I CLEAN EXTRACT
O OFF
II FLOOD EXTRACT

Tool Application: The Portable Water Extractor removes excess water after floods to accelerate drying of materials. It can also serve as a carpet extractor for deep cleaning of all types of carpet.

Tool Operation:

Step	Action
1	For WATER EXTRACTION , remove gray vacuum hose and power cord over the wand. Unclip the wand from the back of the machine.
2	Connect gray vacuum hose to inlet on top front of machine. Attach blue hose to brass fitting at lower front of the unit, pulling back on the brass fitting to make a solid connection.
3	Attach both hoses to wand.
4	Attach 5/8-in. hose to waste tank pumpout valve on lower back of machine. Secure the other end of the hose in a toilet or large floor drain.
5	Plug machine into 15-amp (minimum) grounded outlet.
6	Select Flood Extract mode on side of machine.
7	Starting as close to the water source as possible, extract surface water by pulling the wand toward you across the surface, applying pressure as you pull. Continue pulling/pushing the wand in multiple overlapping passes to extract as much water as possible. (Do not submerge hose end or wand head in standing water.)
8	When finished, continue to run the unit in Flood Extract mode for a minute or so to help dry out the machine inside.
9	Place one or more carpet dryers to evaporate any remaining moisture in the carpet and pad. Also add a dehumidifier in the space to remove the evaporated moisture and help accelerate drying.
10	If CARPET CLEANING , follow above steps 1-3, then plug machine into 15-amp (minimum) grounded outlet.
11	Pre-treat heavily soiled areas with professional prespray for high traffic areas. Add professional cleaning product to blue fresh water tank. Fill tank with 10 gallons of hot tap water.
12	Select Clean Extract mode on side control panel. Squeeze the trigger while sliding the wand 4 ft. forward and back. Release trigger and slide wand over each section at least 2 times in overlapping passes.
13	When recovery tank is full and you hear a high-pitched noise, switch machine to OFF immediately and drain waste water directly into toilet, using front drain hose. Refill fresh water tank with solution and hot water as needed to clean additional areas.
14	When cleaning is completed, empty and rinse the waste tank thoroughly.
15	Turn the Clean Extract switch on and allow it to run for 5 minutes to help remove any moisture from the vacuum motors.



WARNING: This product may expose you to chemicals, including lead and phthalates, known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to P65Warnings.ca.gov