



Operation and Safety Guide

Dehumidifier 18G/day
DrizAir 1200 - Model # 103996

Vendor Website: HD.dri-eaz.com

Support Phone No. 1-800-932-3030

WARNING

SAFETY TOPICS:

Read and understand manual before use.

Please visit www.dri-eaz.com



SAFETY CHECKLIST:

FIRE AND ELECTRIC SHOCK HAZARD

1. Unit must be electrically grounded.
2. Insert 3-prong plug on power cord directly into matching grounded receptacle.
3. Do not use with an adapter.
4. Do not use with an extension cord.
5. Inspect power cord before use. Never operate with damaged power cord.




WARNING

1. Keep wiring and motor dry.
2. Do not exposure to rain, snow or water.
3. Do not operate in standing water.
4. If electrical components become wet, allow them to dry completely before using.



WARNING: This product may expose you to chemicals, including lead and phthalates, known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to P65Warnings.ca.gov

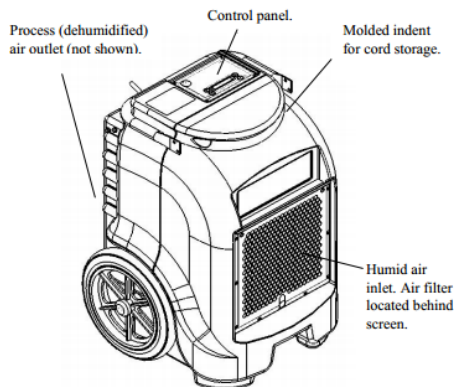

Tool Application: The Dehumidifier removes excess moisture from the air in enclosed spaces to control humidity or accelerate drying of materials.

Tool Operation:

Step	Action
1	Always store, transport, and use the unit in vertical position. If the unit has been laid on its back, stand unit up and wait at least 30 minutes before turning it on.
2	Place the dehumidifier in room away from anything that could block airflow into the unit. If possible, place airmovers in same area as dehumidifier to evaporate moisture. Place dehumidifier near one of the airmovers. Make sure all doors and windows are closed and that the room's temperature is above 70°F/21°C to promote drying.
2	Uncoil and straighten the hose completely and place the open end in a sink, drain, bucket or outdoors. Do not place the end of the hose higher than 20 ft. above the bottom of the unit. Connect the "quick connect" hose end to the fitting on the back of the unit.
3	Plug the cord into a standard 115V grounded outlet rated for at least 15 amps. Each Dehumidifier needs 6.4 amps to operate.
4	Push On/Off button on control panel. The unit automatically pumps out water periodically.
5	To change languages, unplug the unit, then while holding the button down, plug the unit in. To change to another language, press until the preferred language is displayed. Then unplug the unit and the language will be set.
6	Press button to empty water from the pump reservoir.
7	After using, press On/Off button to turn unit off. Leave unit plugged in. Wait 20 minutes, then press button to empty remaining water from the reservoir before moving unit.
8	Unplug and coil cord around the top of the unit. Drain any remaining water in the drain hose then wrap it around the back hose wrap.
9	When filter appears dirty, replace it with #100250 Dri-Eaz 4-PRO filter.