



Operation and Safety Guide

Revolution PRO Compact Dehumidifier 23G/day Model # F413

Vendor Website: Revolution.drieaz.com

Support Phone No. 1-800-932-3030



WARNING

SAFETY TOPICS:

Read and understand manual before use.

Please visit www.drie-eaz.com



SAFETY CHECKLIST:


FIRE AND ELECTRIC SHOCK HAZARD

1. Unit must be electrically grounded.
2. Insert 3-prong plug on power cord directly into matching grounded receptacle.
3. Do not use with an adapter.
4. Do not use with an extension cord.
5. Inspect power cord before use. Never operate with damaged power cord.



WARNING

1. Keep wiring and motor dry.
2. Do not exposure to rain, snow or water.
3. Do not operate in standing water.
4. If electrical components become wet, allow them to dry completely before using.

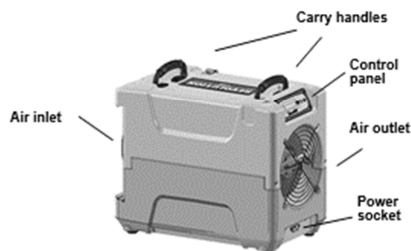

Tool Application: The PRO Compact Dehumidifier removes excess moisture from the air in enclosed spaces to control humidity or accelerate drying of materials.

Tool Operation:

Step	Action
1	Always store, transport, and use the unit in a horizontal position. If the unit is ever placed in a vertical position, return it to the horizontal position and let it stand for at least 30 minutes before turning it on.
2	Place the dehumidifier in room away from anything that could block airflow into the unit. Make sure all doors and windows are closed.
2	Uncoil and straighten the hose completely and place the open end in a sink, drain, bucket or outdoors. Do not place the end of the hose higher than 20 ft. above the bottom of the unit. Connect the "quick connect" hose end to the fitting on the side of the unit.
3	Unwrap the electric cord and plug it into the socket below the air outlet. Plug other end of cord into a standard 115V grounded outlet rated for at least 15 amps. Each PRO Compact Dehumidifier needs 6.2 amps to operate.
4	Push On/Off button on control panel. The unit automatically pumps out water at least every 6 minutes.
5	To change Temperature display, press to scroll through menu items. At TEMP UNITS, press to select Fahrenheit or Celsius.
6	To change Language display, press to scroll through menu items. At LANGUAGE, press to select preferred language.
7	For maximum dehumidification, make sure humidistat is OFF. Press button to reach HUMIDISTAT; if ON, then press to turn Humidistat OFF.. To maintain a constant humidity level, turn humidistat ON then press arrow to set desired humidity level.
8	Press button to empty water from the pump reservoir.
9	After using, press On/Off button to turn unit off. Leave unit plugged in. Wait 20 minutes, then press button to empty remaining water from the reservoir before moving unit.
10	Unplug cord, coil and loop storage strap on side of unit through coiled cord.
11	Drain any remaining water from the drain hose, coil it and loop other storage strap through coiled hose.
12	To clean filter, remove from unit and vacuum to remove dirt / dust. Replace filter after 3 uses with F372 3M High Air Flow filter.