



Command Center Pro - Mobile App

© 2026 Legend Brands



Table of Contents

- 1 Introduction**
- 2 First-Time Admin Use**
- 3 Register Multiple Devices with App**
 - 3.1 Register via Bluetooth (Nearby Devices)**
 - 3.2 Register via QR Code**
 - 3.3 Manage a Registered Device**
- 4 Update Device Firmware with App**
- 5 Add Quick Job**
 - 5.1 Add Rooms**
 - 5.2 Edit Room Names**
 - 5.3 Add Devices to Job**
 - 5.4 Link BLE Protimeter**
 - 5.5 Connect Devices to Wi-Fi**
- 6 Quick Start, Complete and Delete Jobs with App**
- 7 Remote Monitoring with App**
- 8 App Tips and Help**

1 Introduction




Dri-Eaz Command Center Pro (CC Pro) App

Install from Apple Store or Google Play Store



2 First-Time Admin Use


1. Your company must be registered before individual users can sign up. Tap **Register** in the app, or go to <https://commandcenterprodashboard.com/register> from a web browser – both take you to the CC Pro Web Dashboard, where company and user registration are done.
2. After you sign up, check your email and click the confirmation link. If it doesn't arrive, check your spam or junk folder.
3. Once you have your email address and password, use them to sign in to the CC Pro app.
4. If you forget your password, type your email address and tap **Forgot Password** on the login screen to reset it. Tap the eye icon in the password field to show or hide what you've typed as you sign in.

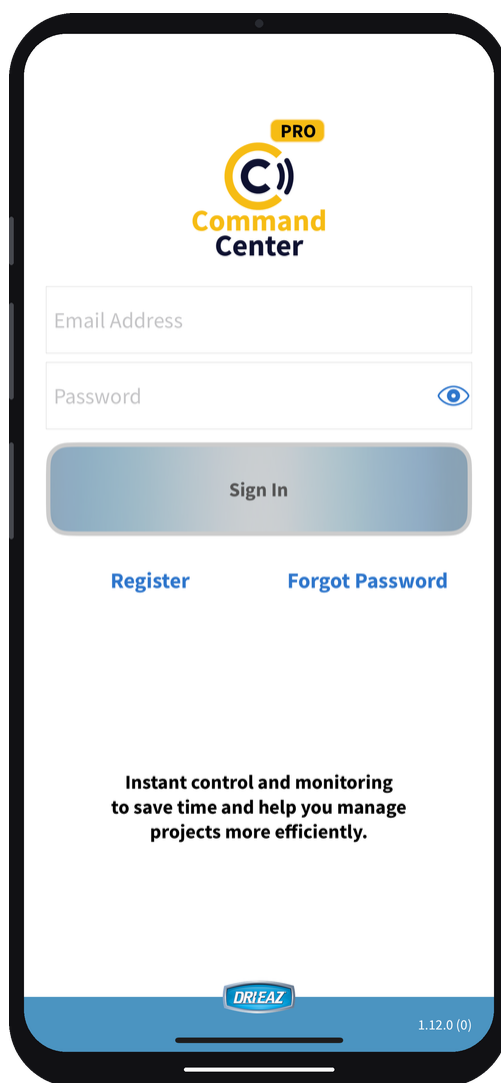

3 Register Multiple Devices with App

There are two ways to register a device: scanning its QR code, or picking it from a live list of nearby Bluetooth devices. Use whichever is more convenient.


Tap **Devices** at the top of the app. From there, tap the QR-scan icon  to scan a device, or the Bluetooth icon  next to it to see nearby devices.

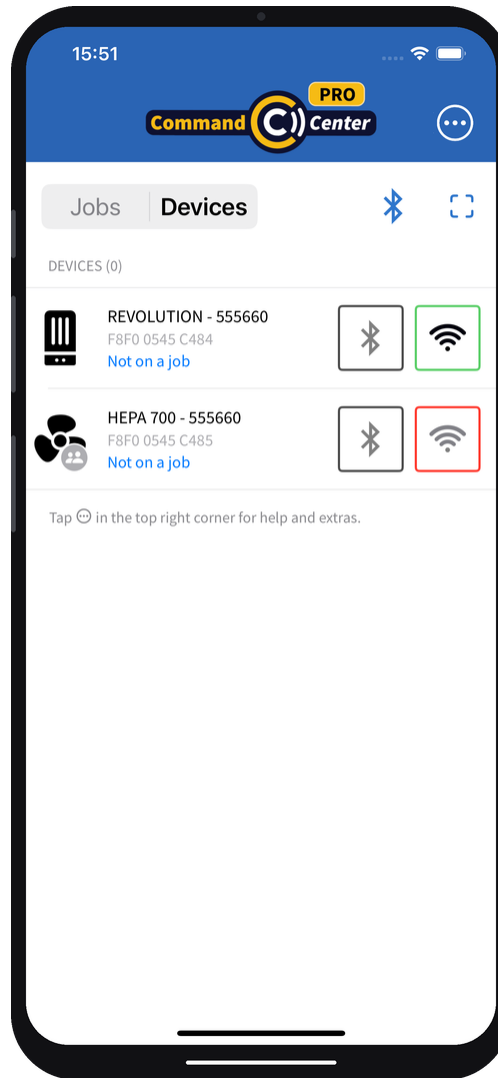

3.1 Register via Bluetooth (Nearby Devices)


1. After tapping the Bluetooth icon , the app lists Command Center Pro devices it can see nearby.
2. Tap the person icon in the top right to switch between registering as **Owned** or **Rented** (Owned is the default).

3. Tap a device in the list to register it. A device that's already registered is shown as such in its row.

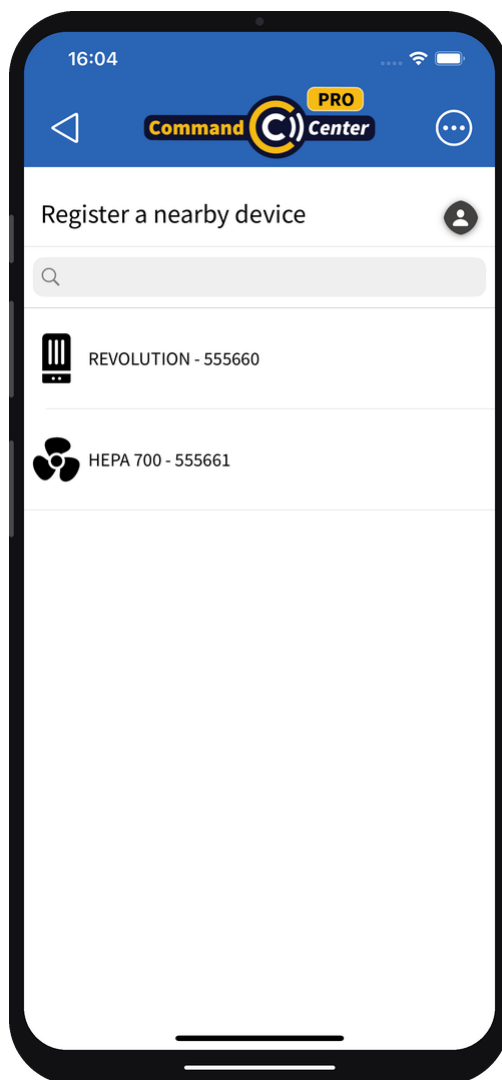


3.2 Register via QR Code

1. On the device's Command Hub screen, touch the main menu, tap > to go to the next screen, then tap **REGISTER DEVICE** to display its QR code.

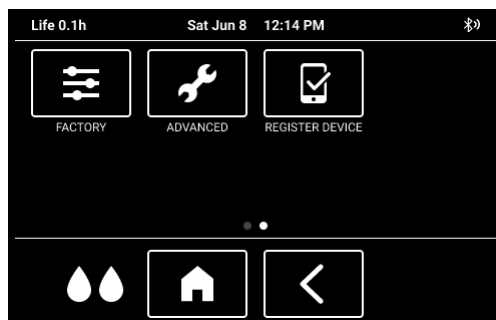

2. After tapping the QR-scan icon  , the app opens the camera to scan devices' QR codes.
3. Tap the person icon in the camera view to switch between registering as **Owned** or **Rented** (Owned is the default).


4. Scan the QR code on the Command Hub screen.
5. Add several new devices at once by leaving the camera open and scanning the other devices' QR codes. Tap **X** to exit camera scan mode.

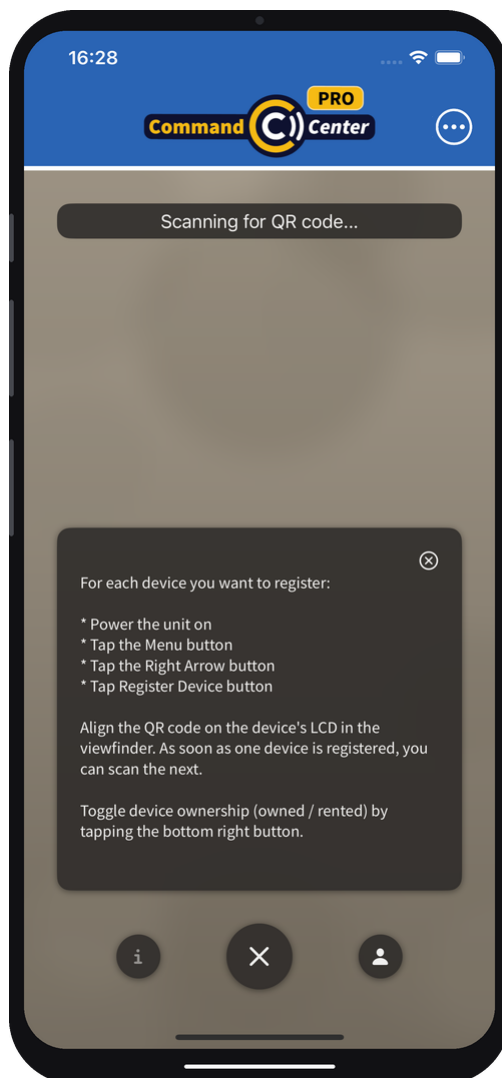

3.3 Manage a Registered Device


On the Devices tab, you can swipe a device's row:

- **Swipe right** to jump to the job and room the device is currently assigned to. Only available while the device is on a job.
- **Swipe left** to unregister the device, removing it from your company's account entirely. Only available while the device isn't on a job – remove it from the job first if it is.

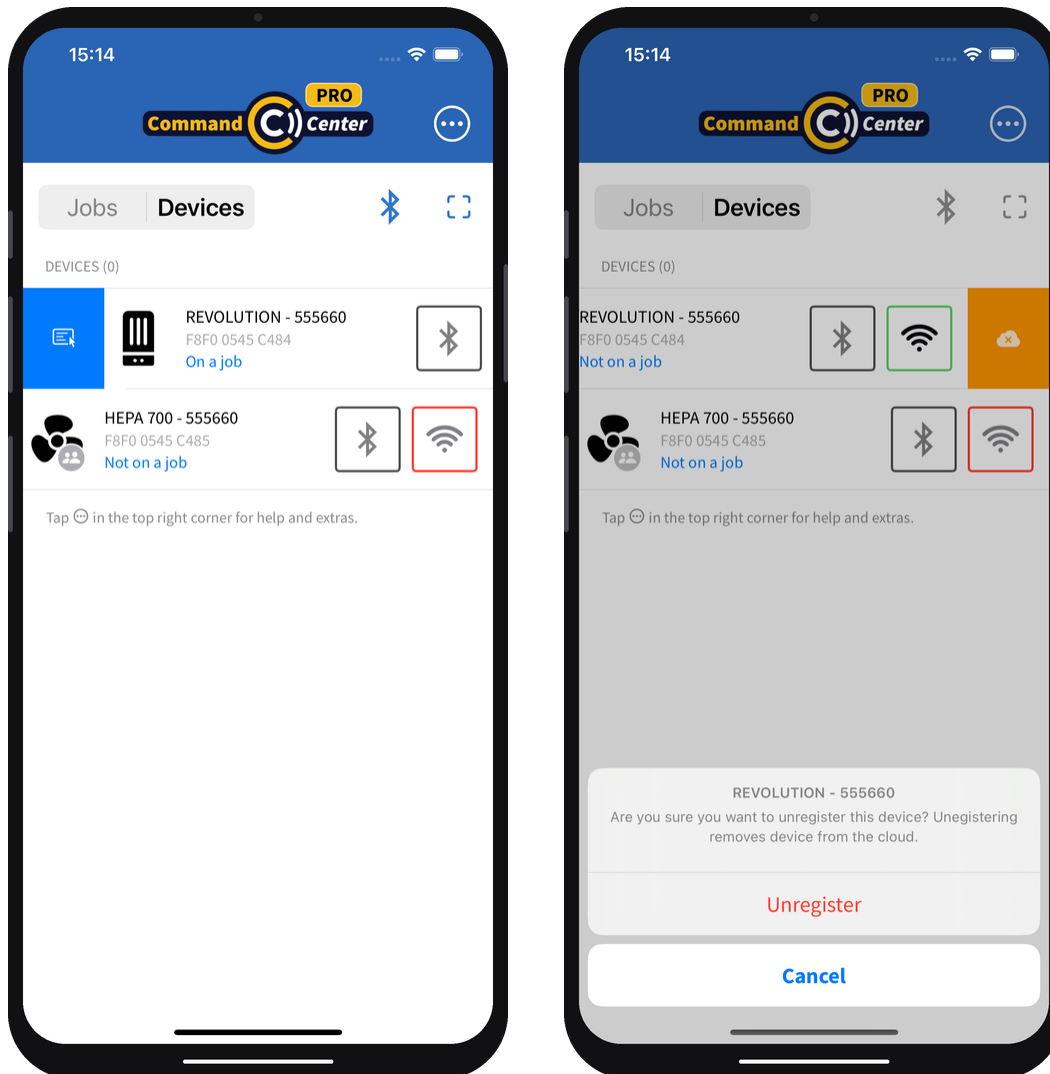

4 Update Device Firmware with App


1. Tap **Devices** at the top of the app.
2. Tap the Bluetooth icon next to the device you want to update, to connect to it.

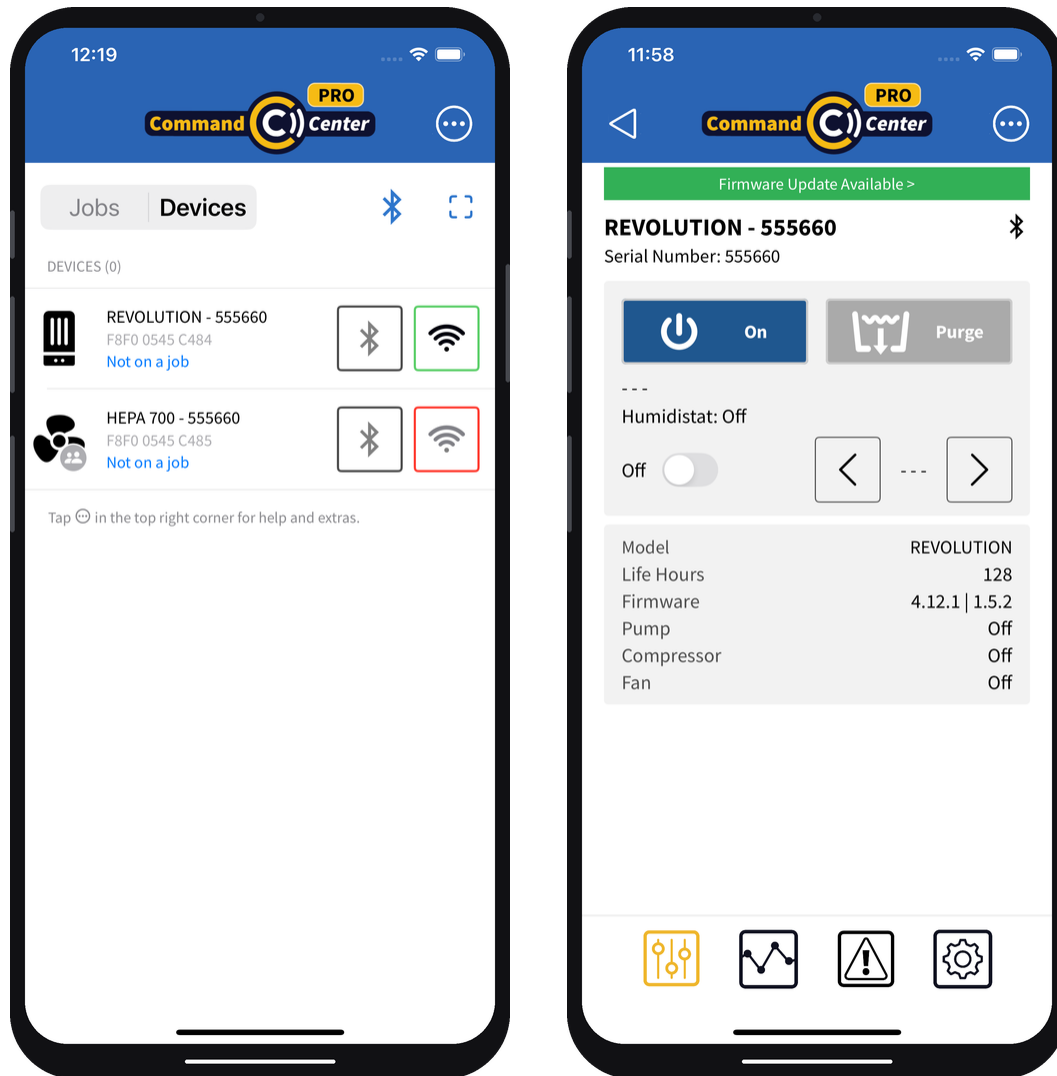


3. After connecting to the device:

- **Required update:** if an update is required, the app automatically takes you to the Firmware Update screen.
- **Optional update:** a green **Firmware Update Available** banner appears at the top of the device's screen. Tap it to open the Firmware Update screen.
- **Check manually:** tap the gear icon at the bottom to open Settings, then tap **Update Firmware**.

4. On the Firmware Update screen, the Installed, Required, and Latest firmware versions are shown. Once it reads "Ready to Update," tap **Start Firmware Update**.

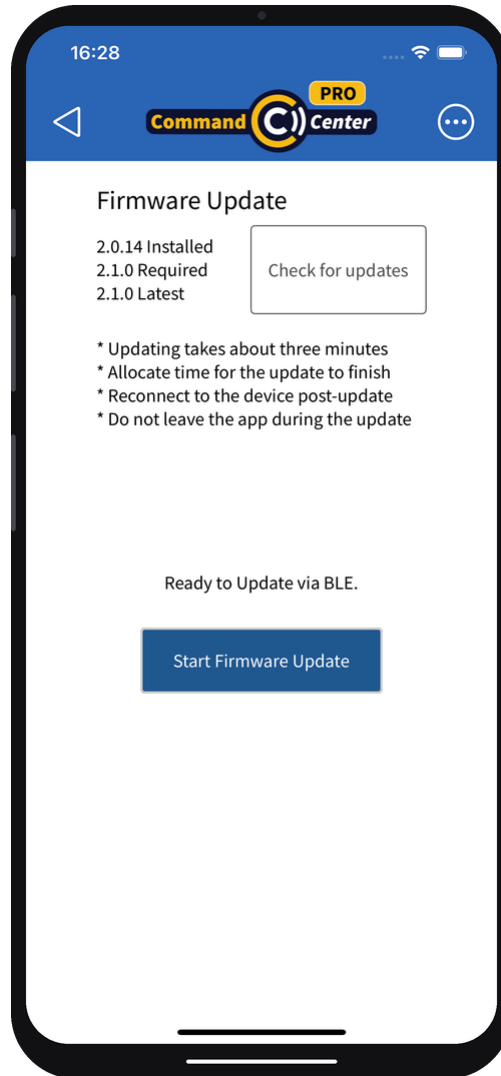

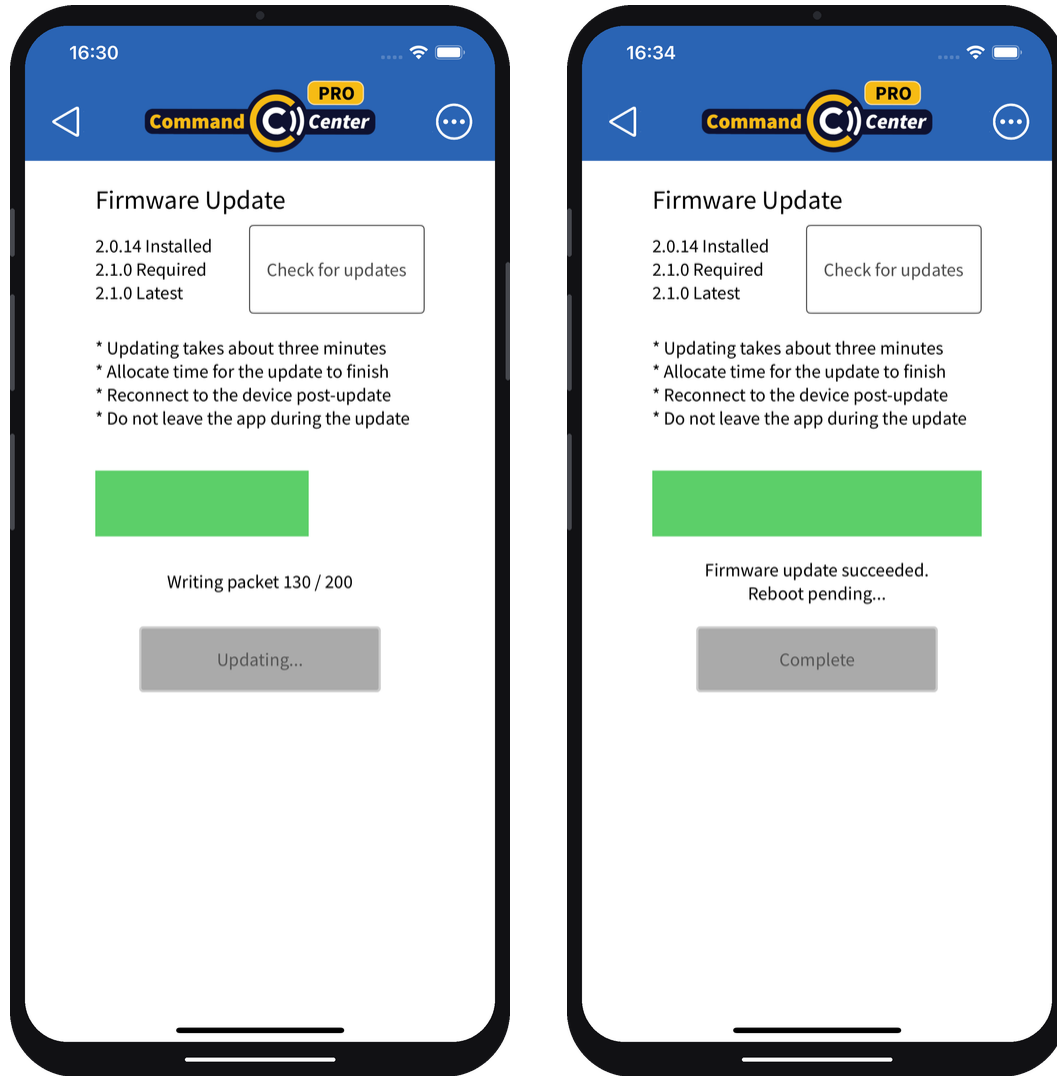


Important: During the update, the device will be unresponsive. Do not change screens, place a call, close the app, or take any other action on your mobile device until the process is complete, as shown on the app and the Command Hub screen. (The process may take up to a few minutes per device.)

5. Bluetooth disconnects at the end of the update. Reconnect to the device and verify the firmware version has been updated.


5 Add Quick Job

1. Tap **Jobs** at the top of the app and tap the + sign.

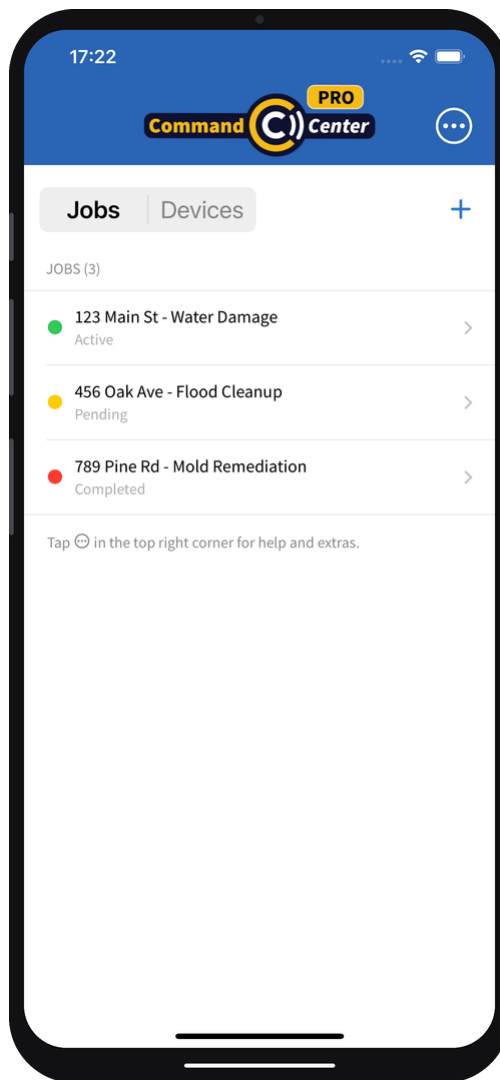

2. Tap the **Start Immediately** slide switch on the app.

3. Complete the required fields (*) and tap **Save**. (A Manager can complete the rest of the Job information on the Dashboard.)

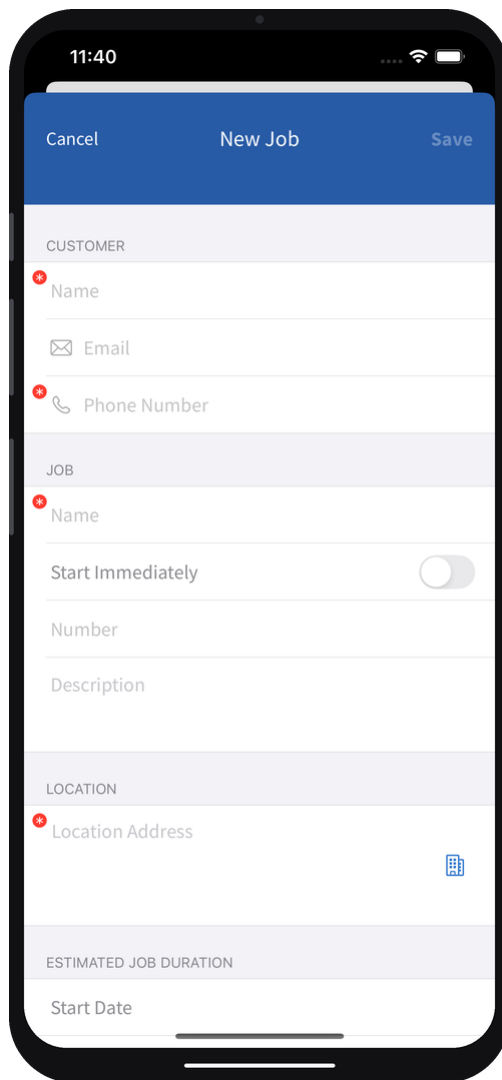

11:40

Cancel New Job Save

CUSTOMER

* Name

Email

* Phone Number

JOB

* Name

Start Immediately ☐

Number

Description

LOCATION

* Location Address

ESTIMATED JOB DURATION


Start Date

5.1 Add Rooms

Add Rooms to a Job:

1. Select the Job.

2. Tap + to add a Room name and tap **Save** in the upper right.

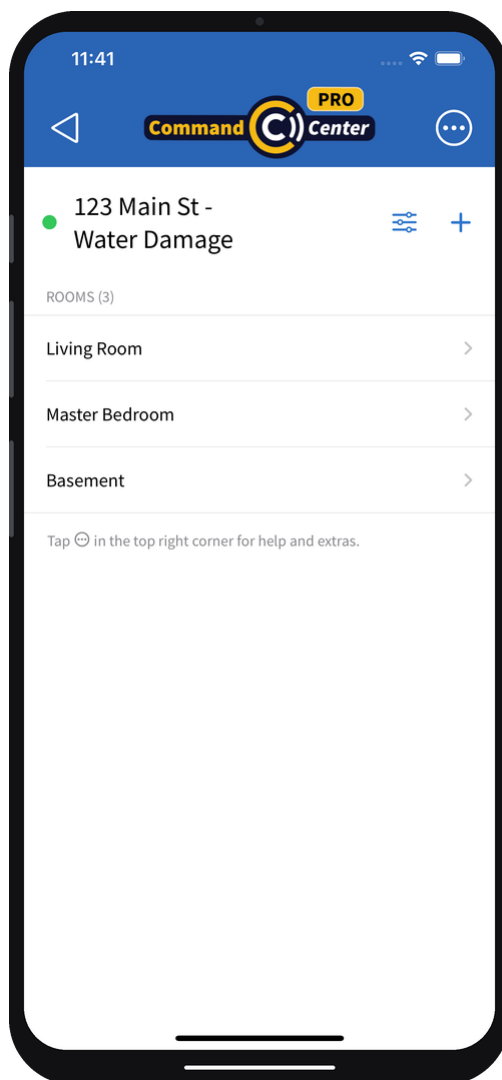

5.2 Edit Room Names


Edit Room names:

1. Select the room, then tap the filter icon.
2. Tap **Edit** and rename the Room.
3. Tap **Save**.

5.3 Add Devices to Job

Note: The device must already be registered to your company account before it can be added to a room – see [Chapter 3, Register Multiple Devices](#). If a device doesn't appear in the list below, register it first.

1. Select the job to which you want to add a device.
 - a. Select the named room and then tap + to add a device to that room.

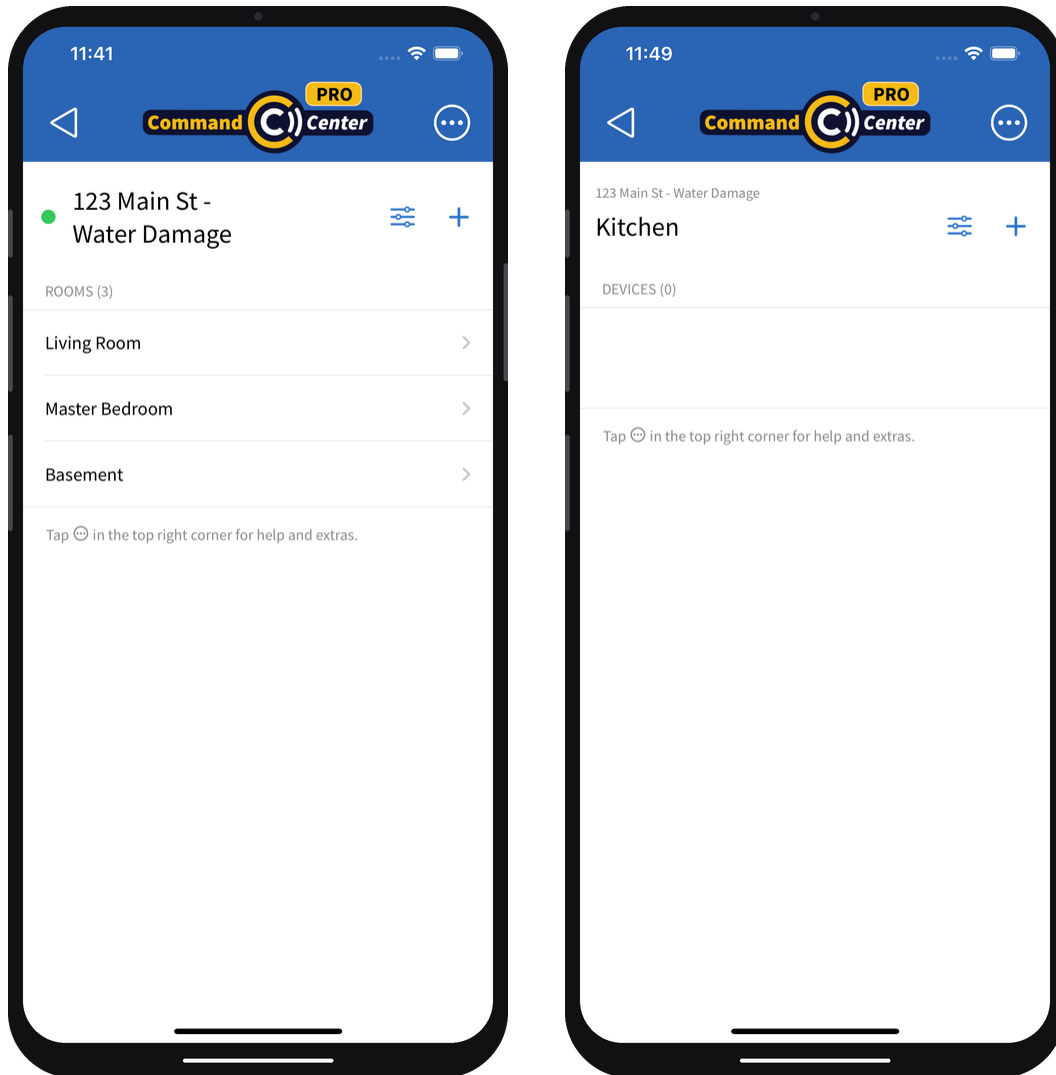

- b. Tap the registered device with the serial number that matches the desired device to add it to the room.
 - c. The device is now assigned to the job.
 - d. Reset the job hours on the device.

5.4 Link BLE Protimeter

1. Go to the job to which you want to add the device.

2. Select the room.
3. Tap the + sign at the top right of the screen.
4. Select the BLE device you want to add.
5. Select the parent device (Command Hub-equipped dehumidifier or air scrubber).


5.5 Connect Devices to Wi-Fi

Connect devices to Wi-Fi while at the job site:


1. Wi-Fi signal at the job site must remain stable to maintain the Wi-Fi remote connection. If uncertain about the stability of jobsite Wi-Fi, connect a mobile hotspot as the Wi-Fi source and leave it onsite during the job.
2. Touch the Command Hub screen on the device.
3. Tap the icon next to the correct device name and serial number.




4. Tap the Settings icon.

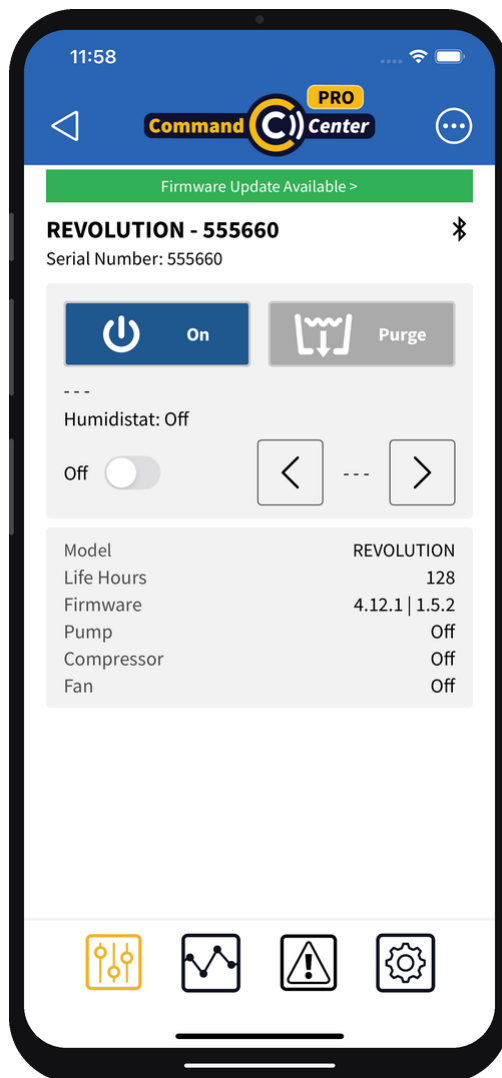

5. Scroll down and tap **Wi-Fi Credentials**.

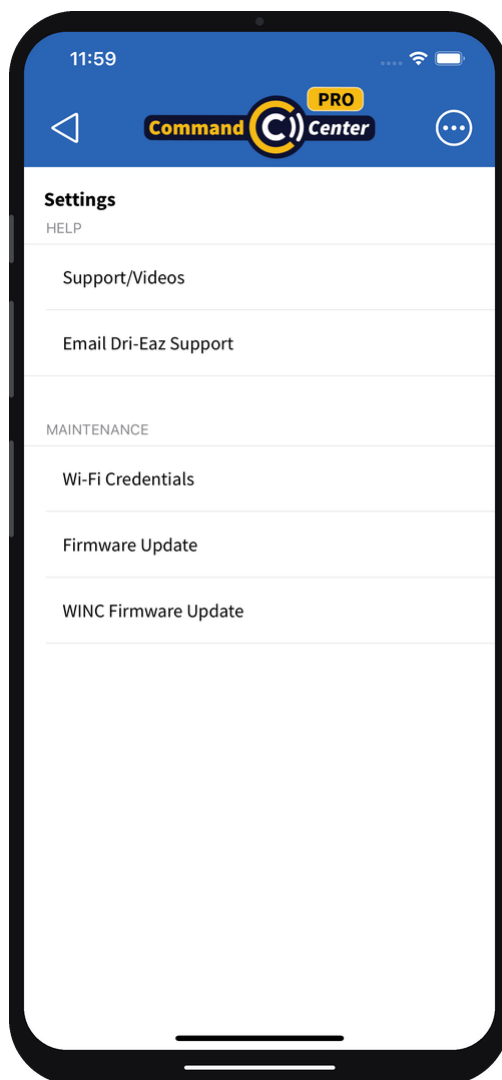

6. Tap Networks and choose the Wi-Fi network you wish to connect with.

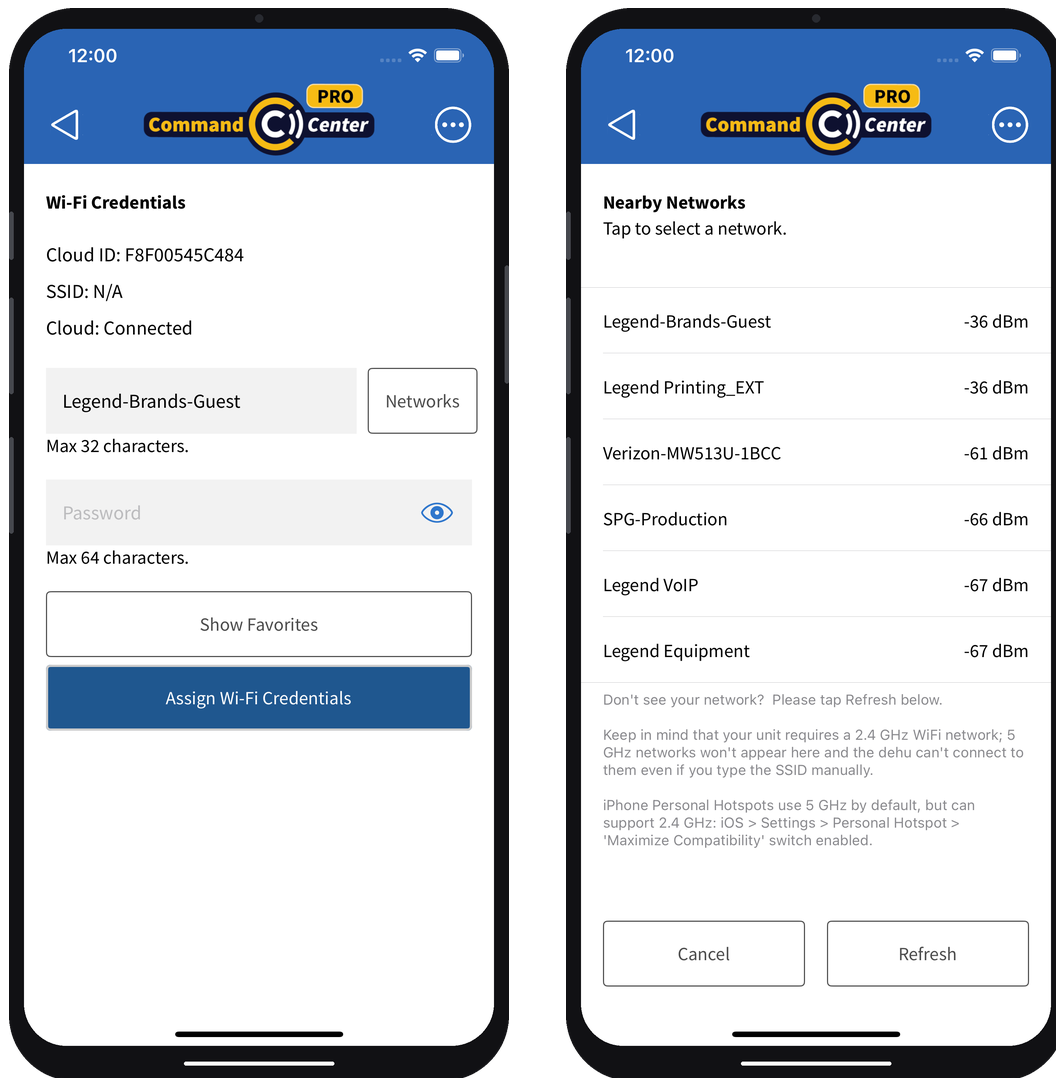


7. Enter the network password if required.

8. Tap Assign Wi-Fi Credentials.

9. Tap < Devices (tap Disconnect when prompted).


10. The Wi-Fi icon next to the selected device will change from red to green when the device is connected to Wi-Fi.

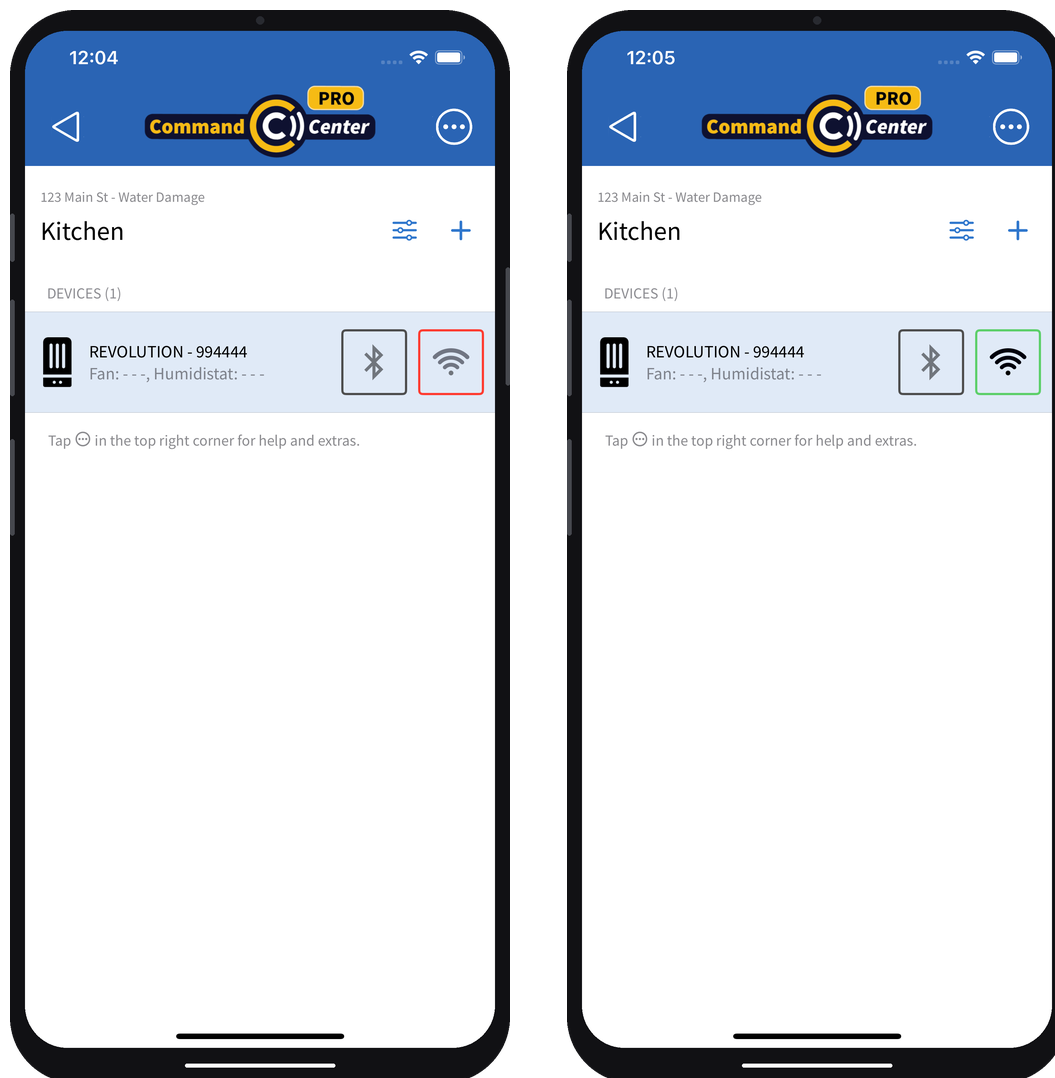


11. Tap the icon to confirm you can monitor and control the device via Wi-Fi.

6 Quick Start, Complete and Delete Jobs with App


1. Open the CC Pro app.
2. Tap **Jobs** at the top.
3. Select a Job.
4. To **Start** a Job, swipe right on the selected job, tap the **green** button, and tap **Start** when prompted.

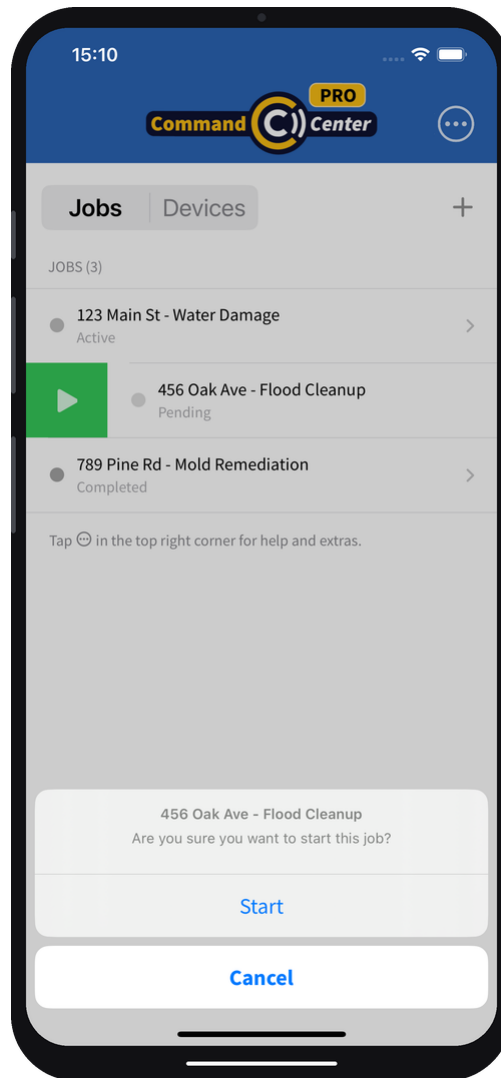

5. To **Complete** a Job, swipe right on the selected active job, tap the **red** button, and tap **Complete** when prompted.

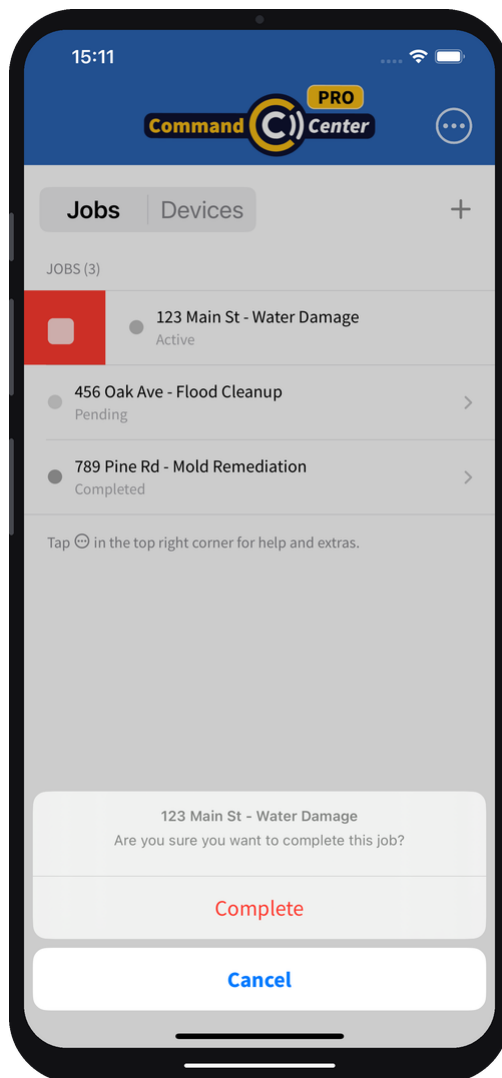


6. To **Delete** a Job, swipe left on the selected job, tap the **red** trash can button, then tap **Delete** when prompted.

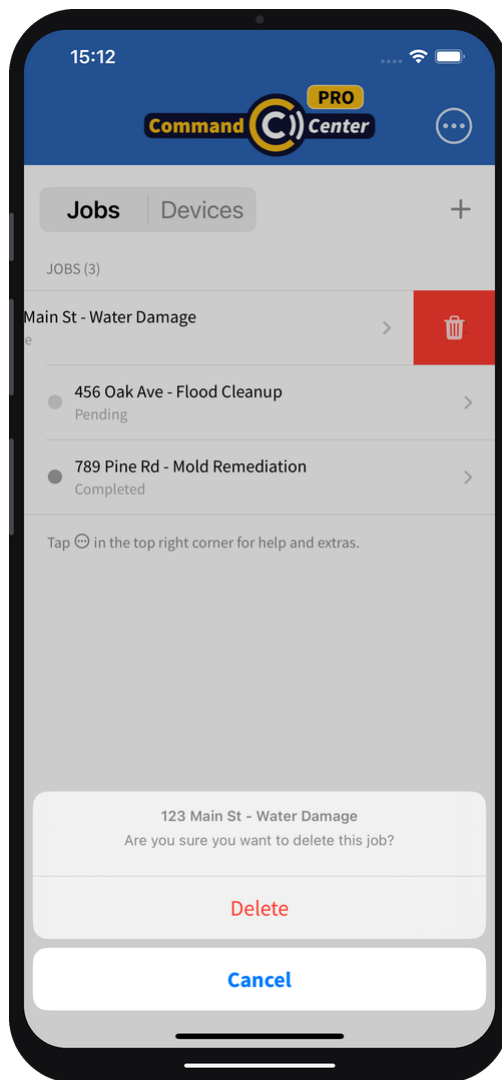


7 Remote Monitoring with App

1. Open the CC Pro app.
2. Select a Job, then select a Room.
3. Tap the icon next to the device you want to monitor/control.
4. The app screen goes dark while the app retrieves the latest data.
5. Remote Monitoring via Wi-Fi – the device detail screen uses four tabs along the bottom: **Controls**, **Reports**, **Events**, and **Settings**. View Notifications  about error events (e.g. power outages) in the Events tab – not currently available via Wi-Fi.

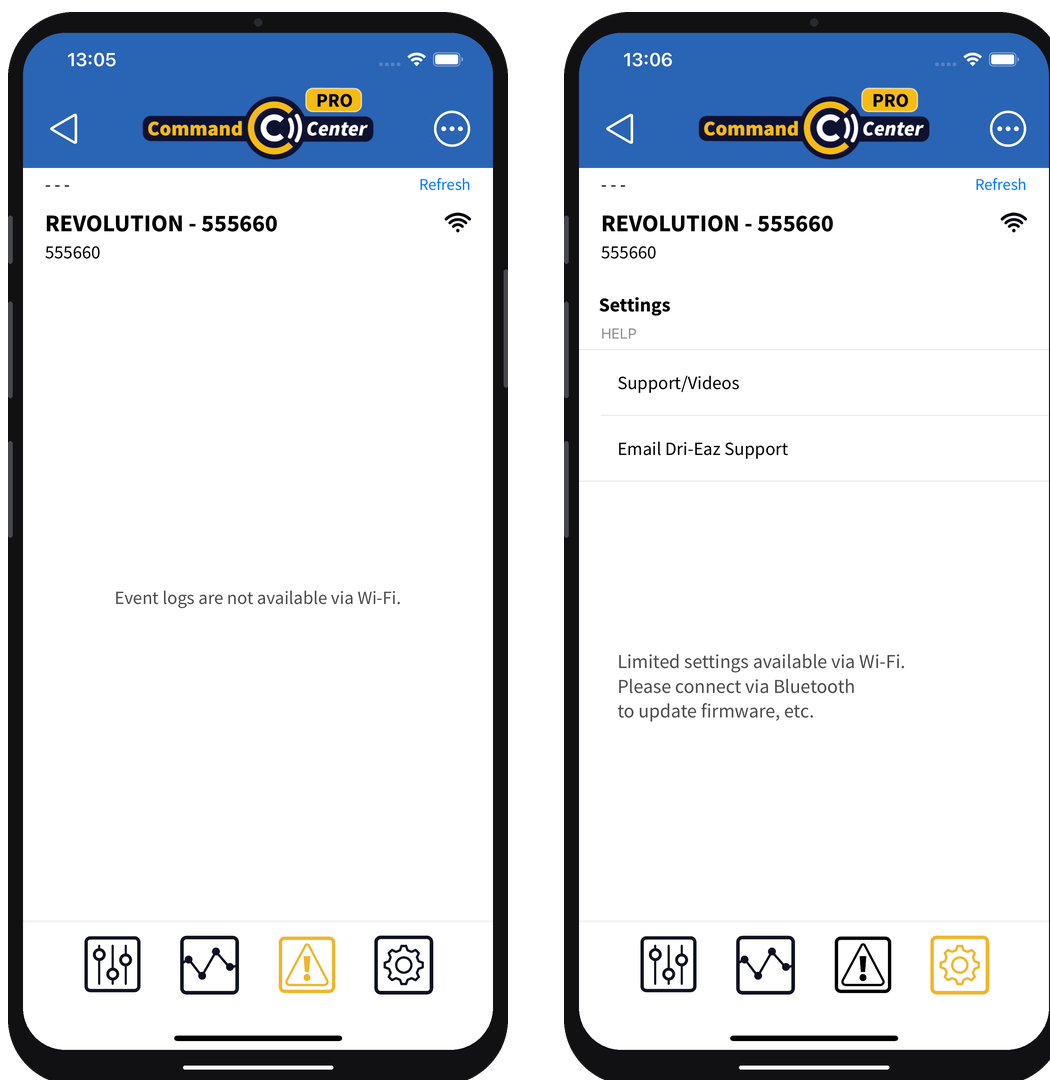


A. Dehumidifiers – tap the Controls tab  - Control: power on/off, manually purge pump, activate Humidistat and set/adjust target % relative humidity (only for ongoing moisture control – does not provide maximum dehumidification) - View: on/off status, humidistat status and % RH

setpoint, pump purging activity, device model, serial number, job and life hours, firmware version, compressor and fan status

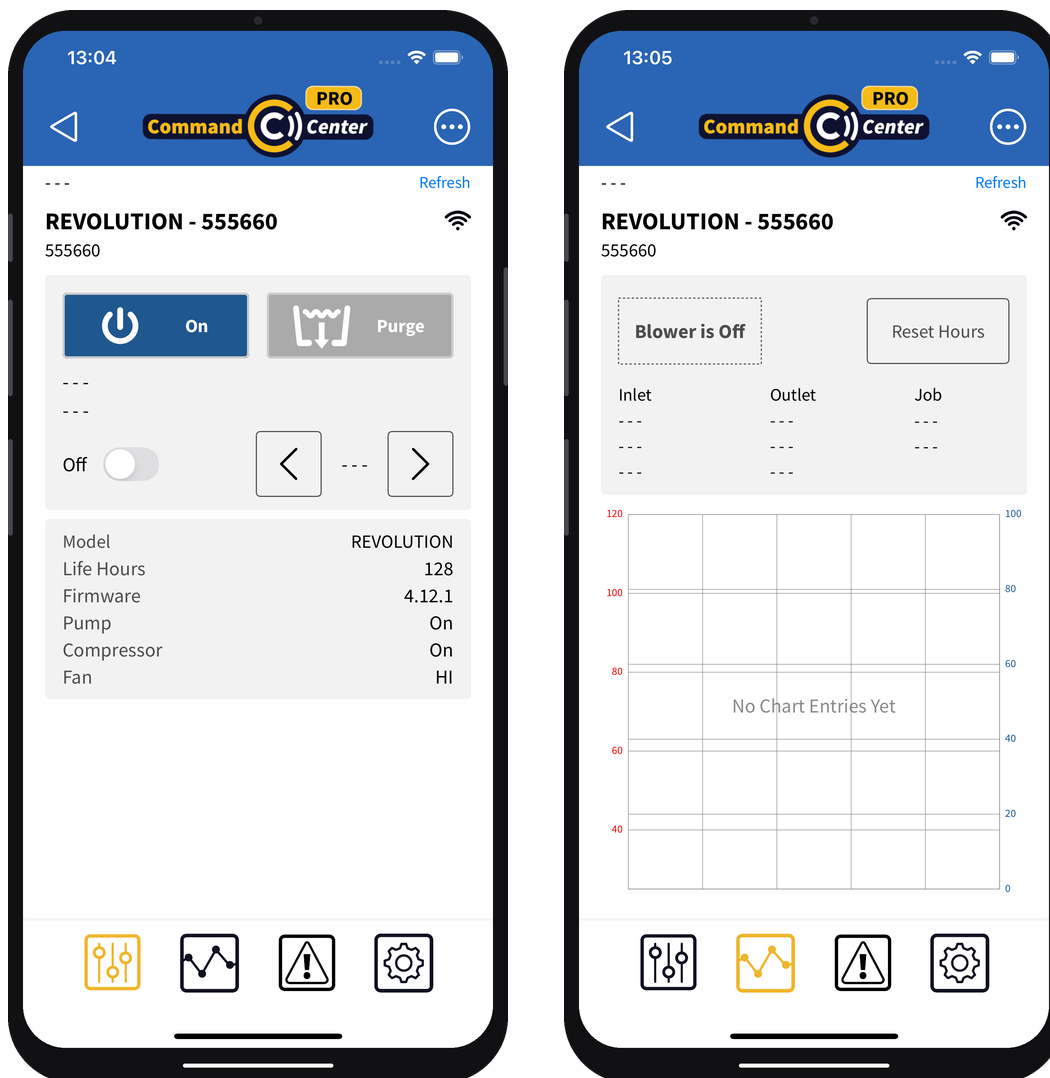

B. Dehumidifiers – tap the Reports tab - Control: reset job hours (should be done only at the beginning of a job) - View: inlet/outlet temperature and % relative humidity, difference in inlet and outlet GPP (grain depression – indicates effectiveness of the dehumidifier), job hours, humidity/drying trends graphed over time (30 data points)

C. Air scrubbers – tap the Controls tab  - Control: power on/off, adjust fan speed, reset job hours (if not already reset at the beginning of the job) - View: on/off status, HEPA filter status, fan speed, job hours, device model, serial number and firmware version

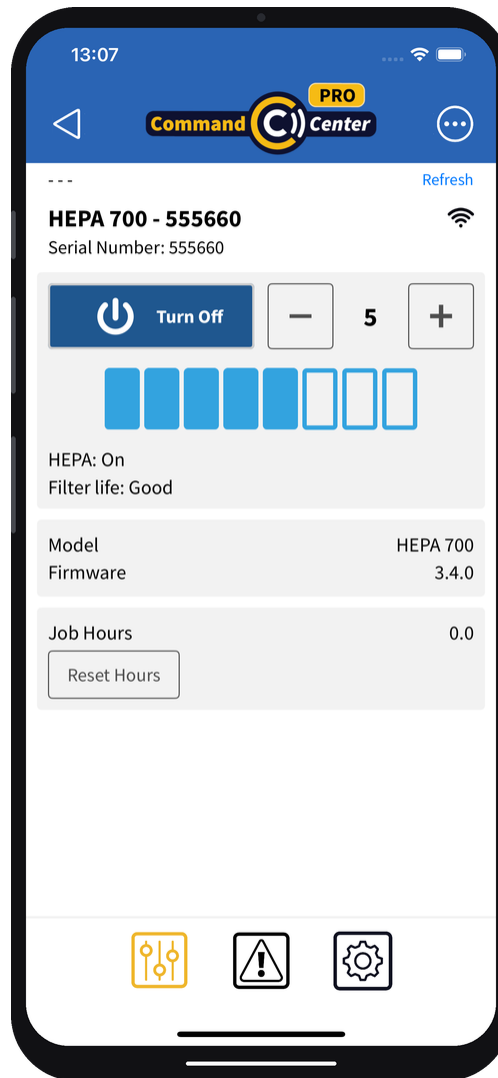



8 App Tips and Help

Go to <https://www.legendbrands.com/resources/command-center/> for videos, FAQs and more.