Command Center Pro - Mobile App

© 2026 Legend Brands

Table of Contents

1 Introduction

2 First-Time Admin Use

3 Register Multiple Devices with App

- 3.1 Register via Bluetooth (Nearby Devices)
- 3.2 Register via QR Code
- 3.3 Manage a Registered Device

4 Update Device Firmware with App

5 Add Quick Job

- 5.1 Add Rooms
- 5.2 Edit Room Names
- 5.3 Add Devices to a Job
- 5.4 Link a BLE Protimeter
- 5.5 Connect Devices to Wi-Fi

6 Quick Start, Complete and Delete Jobs with App

7 Remote Monitoring with App

- 7.1 Open a Device from a Job
- 7.2 Open a Device from the Devices Tab
- 7.3 Use the Device Screen

8 App Tips and Help

© 2026 Legend Brands

1 Introduction

Dri-Eaz Command Center Pro (CC Pro) App

Install from Apple Store or Google Play Store








© 2026 Legend Brands

2 First-Time Admin Use

1. Your company must be registered before individual users can sign up. Tap **Register** in the app, or go to commandcenterprodashboard.com/#/registration from a web browser – both take you to the CC Pro Web Dashboard, where company and user registration are done.
2. After you sign up, check your email and click the confirmation link. If it doesn't arrive, check your spam or junk folder.
3. Once you have your email address and password, use them to sign in to the CC Pro app.
4. If you forget your password, type your email address and tap **Forgot Password** on the login screen to reset it. Tap the eye icon in the password field to show or hide what you've typed as you sign in.

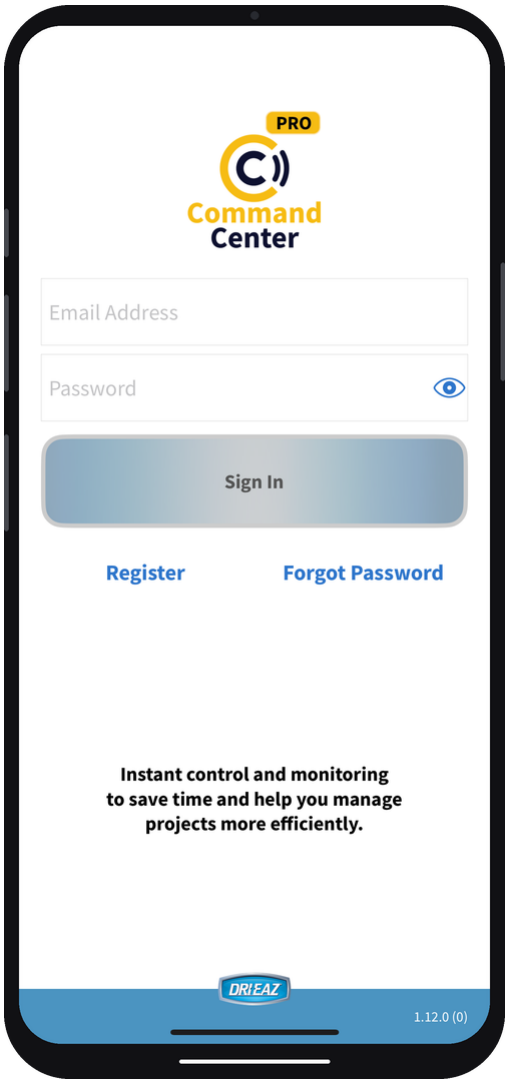


© 2026 Legend Brands

3 Register Multiple Devices with App

There are two ways to register a device: scanning its QR code, or picking it from a live list of nearby Bluetooth devices. Use whichever is more convenient.

Tap **Devices** at the top of the app. From there, tap the QR-scan icon to scan a device, or the Bluetooth icon next to it to see nearby devices.

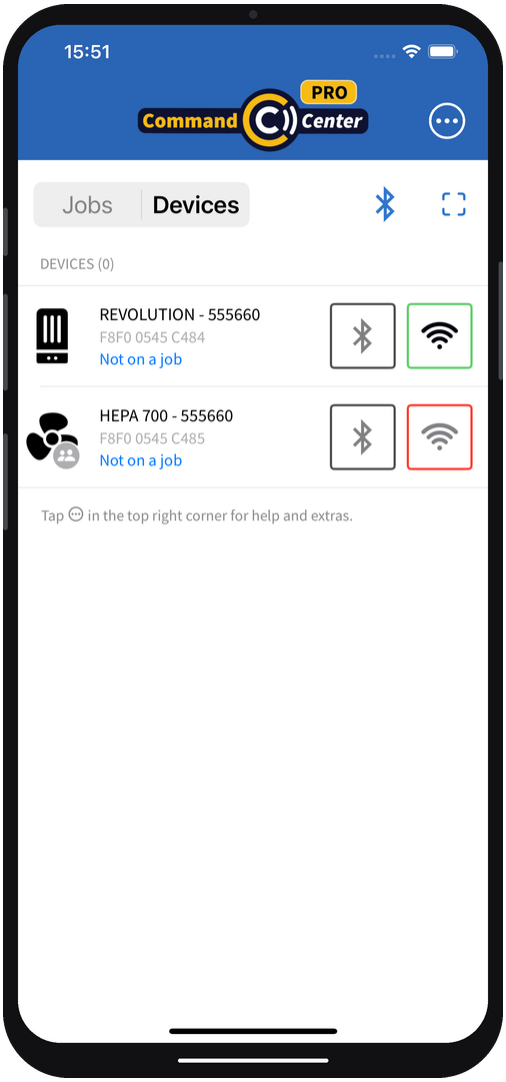


3.1 Register via Bluetooth (Nearby Devices)

1. After tapping the Bluetooth icon , the app lists Command Center Pro devices it can see nearby.
2. Tap the person icon in the top right to switch between registering as **Owned** or **Rented** (Owned is the default).


© 2026 Legend Brands

3. Tap a device in the list to register it. A device that's already registered is shown as such in its row.

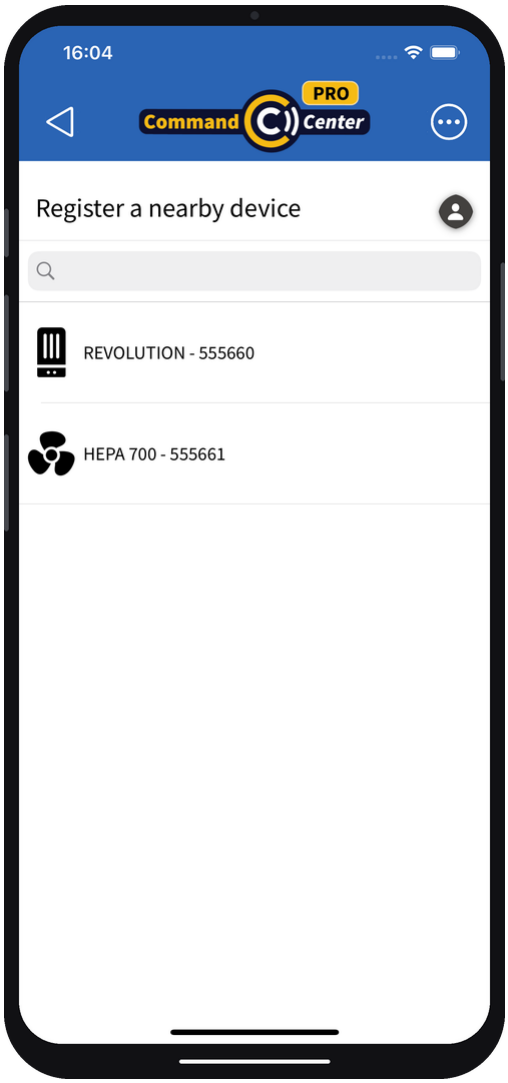

3.2 Register via QR Code

1. On the device's Command Hub screen, touch the main menu, tap **>** to go to the next screen, then tap **REGISTER DEVICE** to display its QR code.

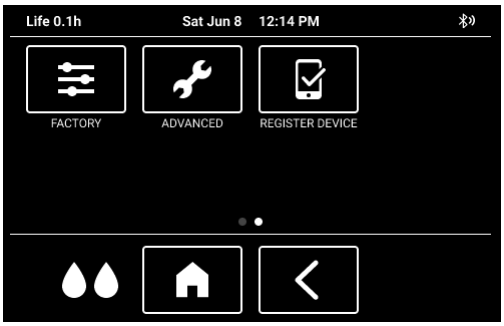


2. After tapping the QR-scan icon , the app opens the camera to scan devices' QR codes.

3. Tap the person icon in the camera view to switch between registering as **Owned** or **Rented** (Owned is the default).

© 2026 Legend Brands

4. Scan the QR code on the Command Hub screen.
5. Add several new devices at once by leaving the camera open and scanning the other devices' QR codes. Tap **X** to exit camera scan mode.

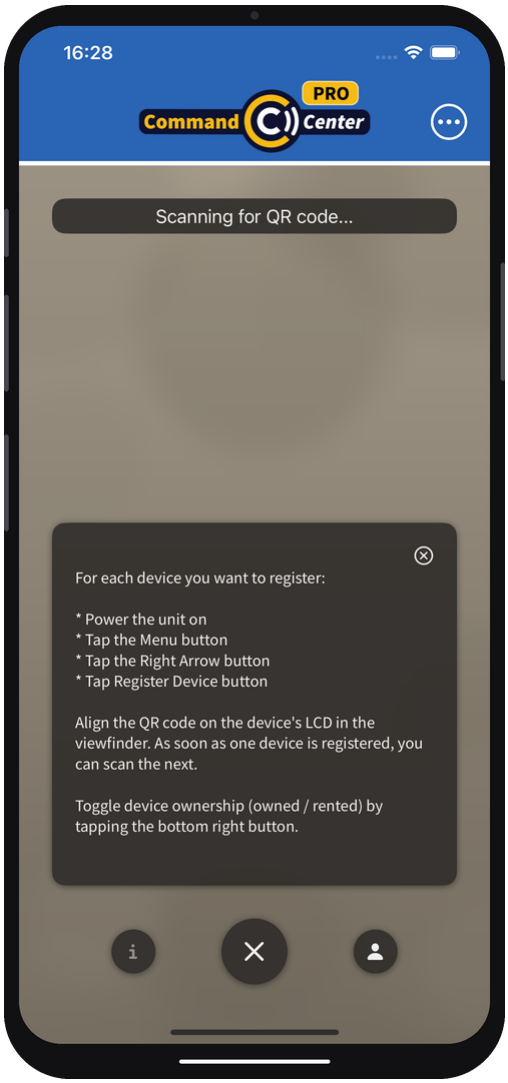


© 2026 Legend Brands

3.3 Manage a Registered Device

On the Devices tab, you can swipe a device's row:

- **Swipe right** to jump to the job and room the device is currently assigned to. Only available while the device is on a job.
- **Swipe left** to unregister the device, removing it from your company's account entirely. Only available while the device isn't on a job — remove it from the job first if it is.

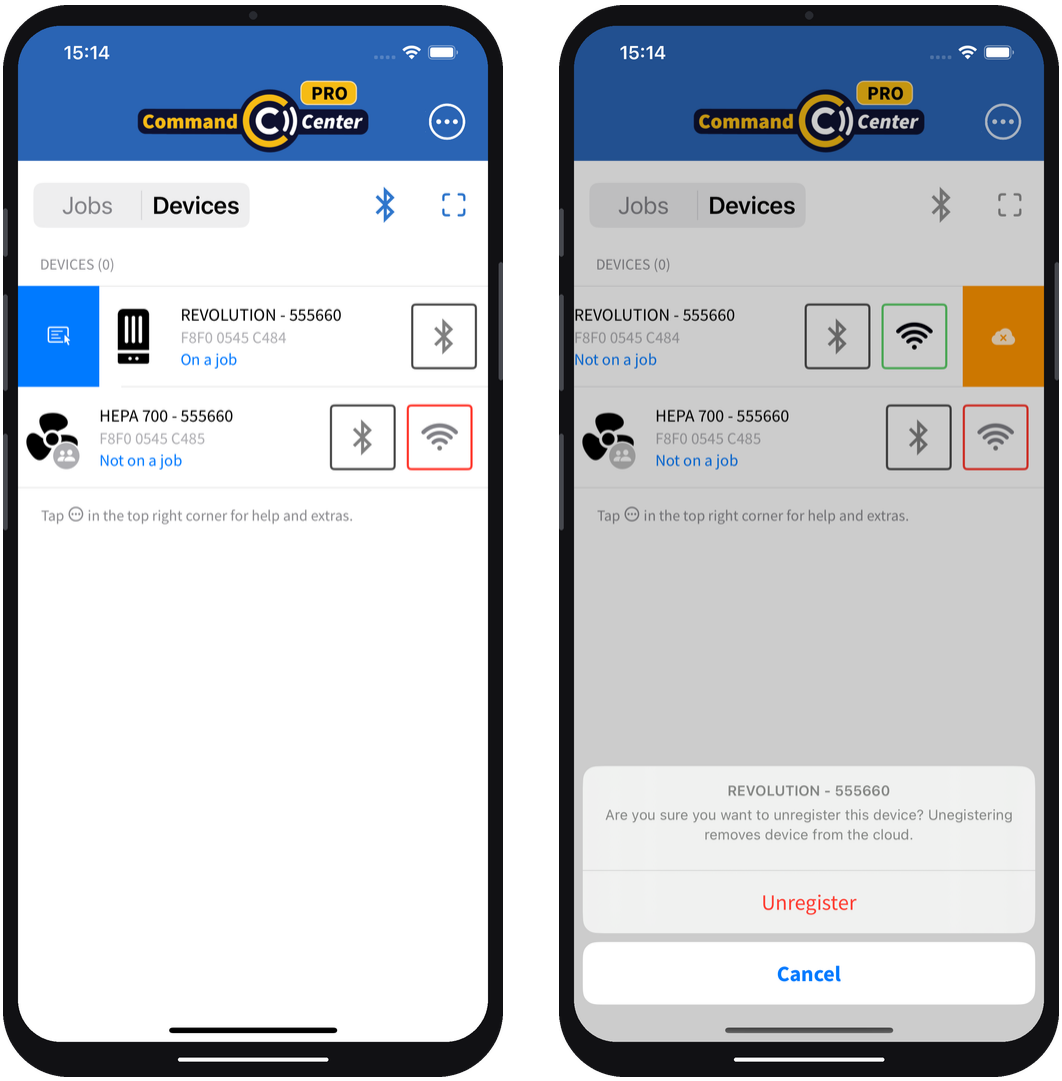


To open a registered device over Wi-Fi from this tab, see Open a device from the Devices tab.

© 2026 Legend Brands

4 Update Device Firmware with App


1. Tap **Devices** at the top of the app.
2. Tap the Bluetooth icon next to the device you want to update, to connect to it.

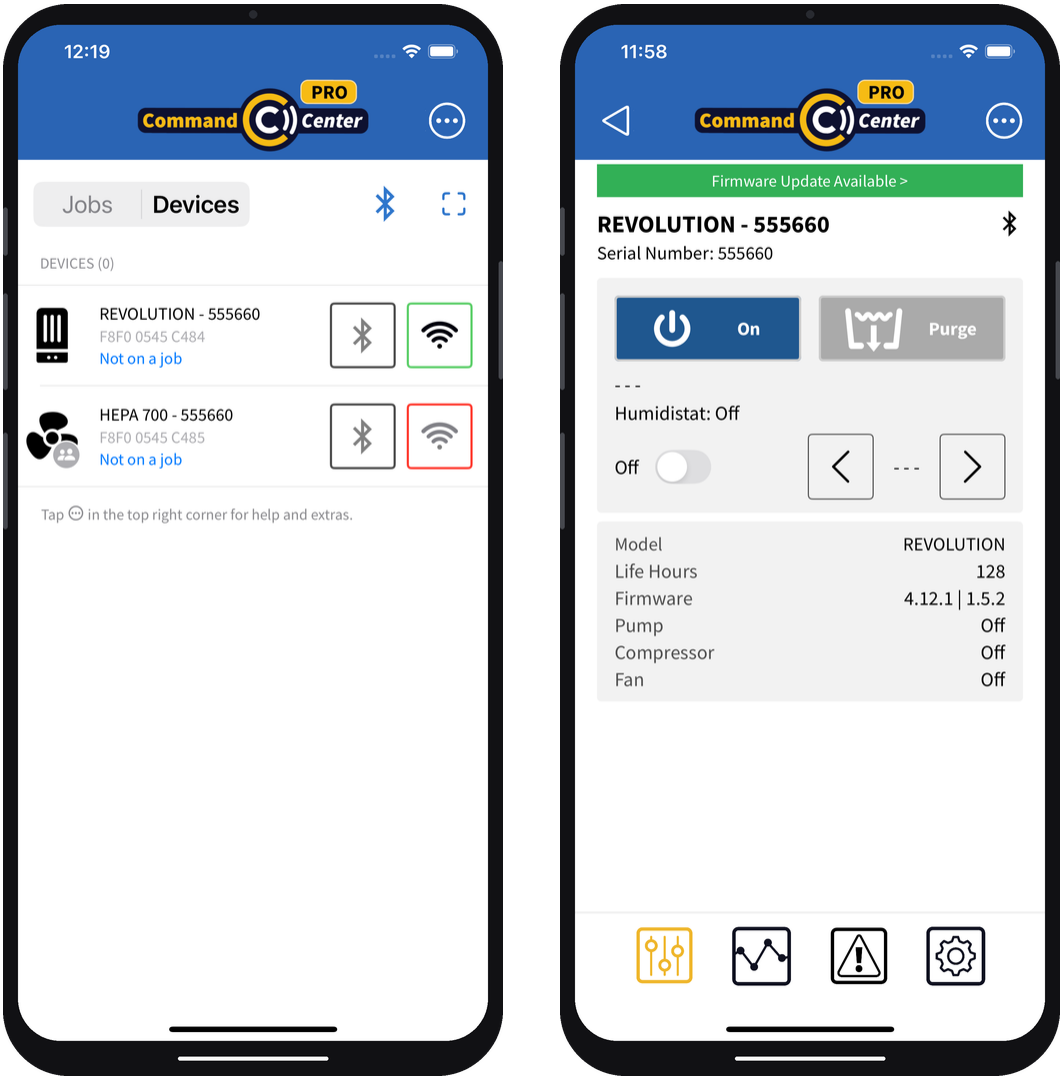


3. After connecting to the device:
   - **Required update:** if an update is required, the app automatically takes you to the Firmware Update screen.
   - **Optional update:** a green **Firmware Update Available** banner appears at the top of the device's screen. Tap it to open the Firmware Update screen.
   - **Check manually:** tap the gear icon at the bottom to open Settings, then tap **Update Firmware**.

© 2026 Legend Brands

4. On the Firmware Update screen, the Installed, Required, and Latest firmware versions are shown. Once it reads "Ready to Update," tap **Start Firmware Update.**

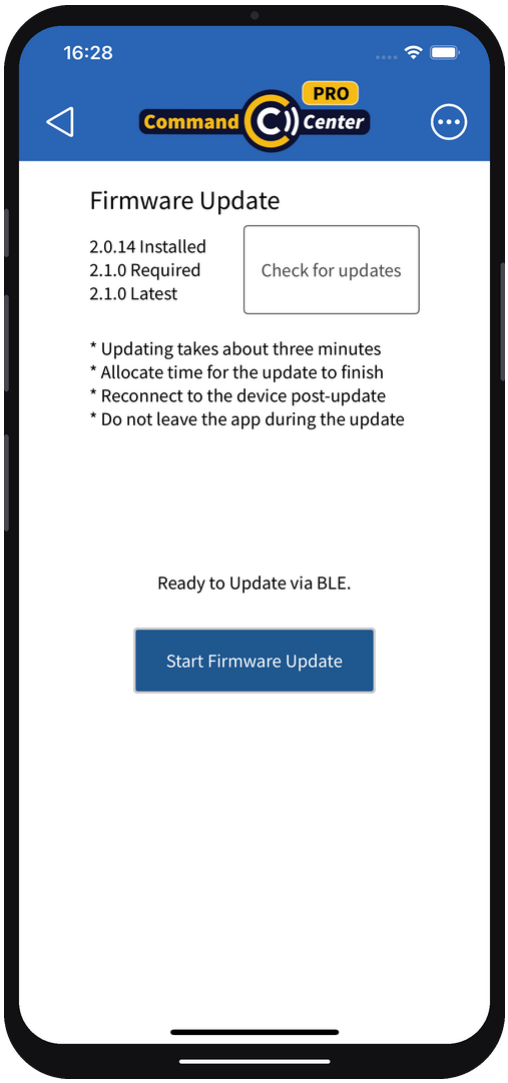

© 2026 Legend Brands

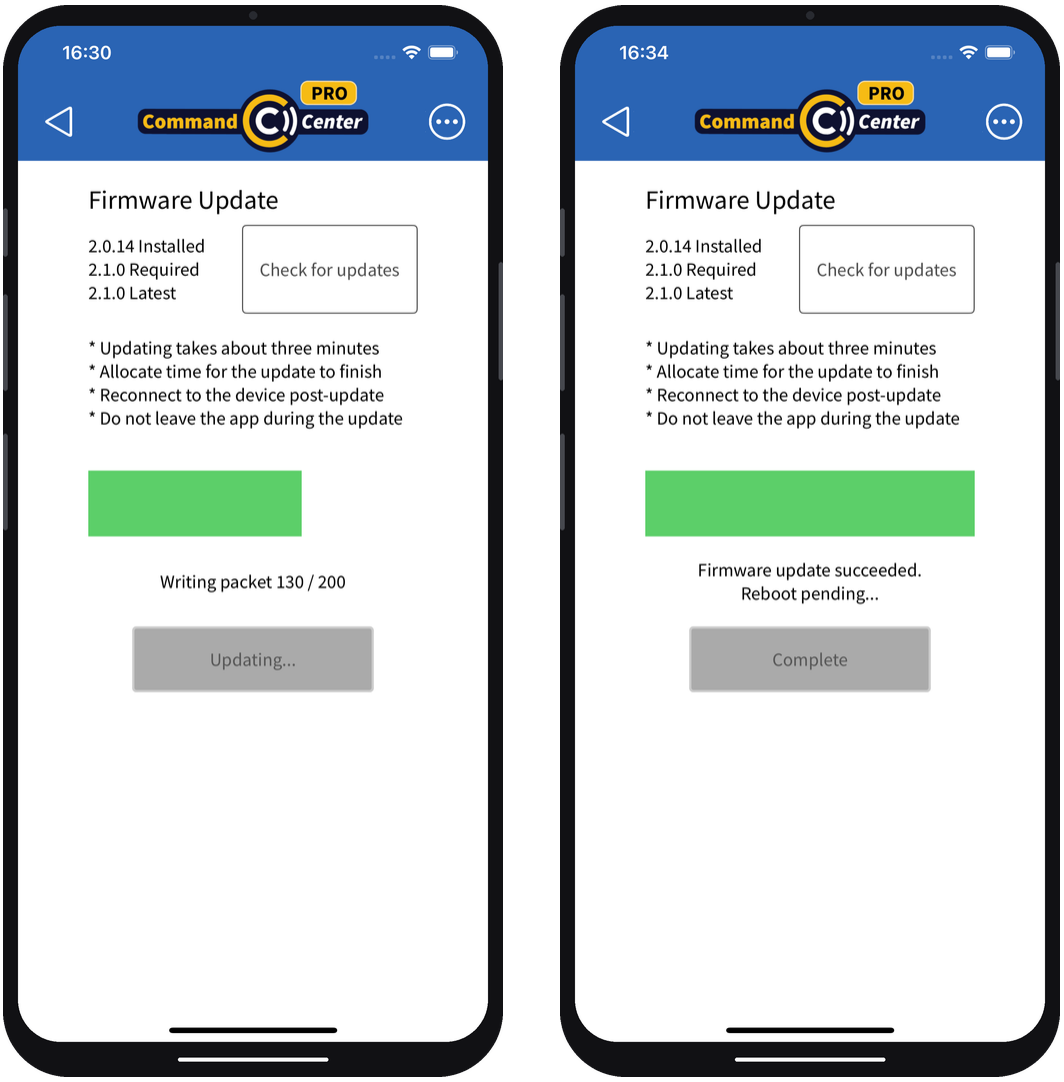


5. Bluetooth disconnects at the end of the update. Reconnect to the device and verify the firmware version has been updated.


> **Important:** During the update, the device will be unresponsive. Do not change screens, place a call, close the app, or take any other action on your mobile device until the process is complete, as shown on the app and the Command Hub screen. (The process may take up to a few minutes per device.)

© 2026 Legend Brands

5 Add Quick Job

1. Tap **Jobs** at the top of the app and tap the **+** sign.
2. Tap the **Start Immediately** slide switch on the app.
3. Complete the required fields (*) and tap **Save**. (A Manager can complete the rest of the Job information on the Dashboard.)

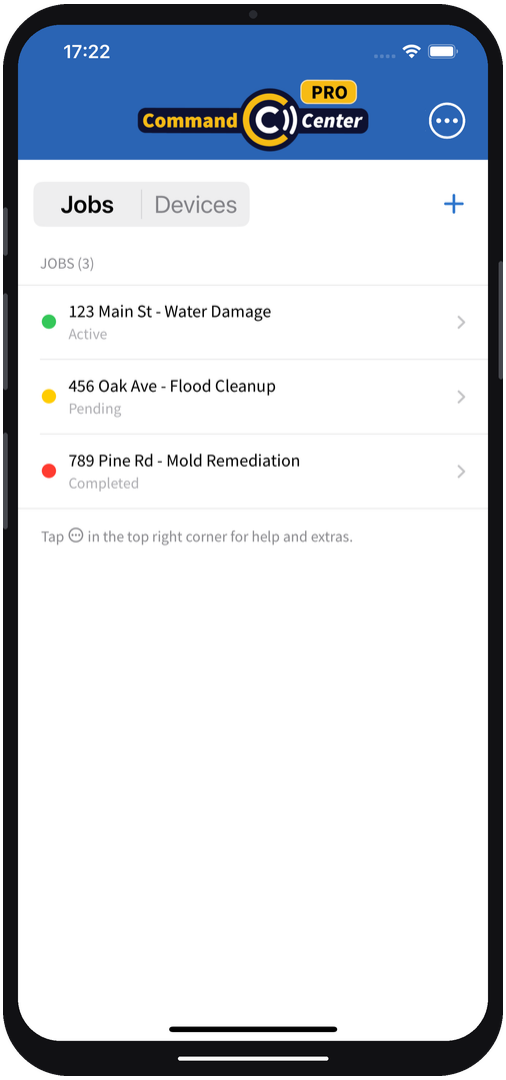


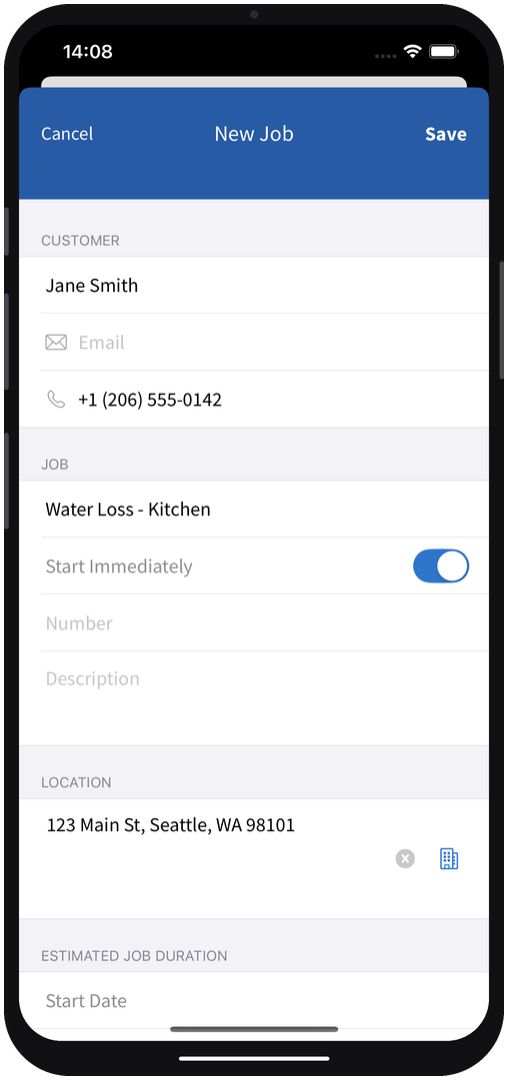

© 2026 Legend Brands

5.1 Add Rooms

1. Select the Job.
2. Tap + to add a Room name and tap **Save** in the upper right.

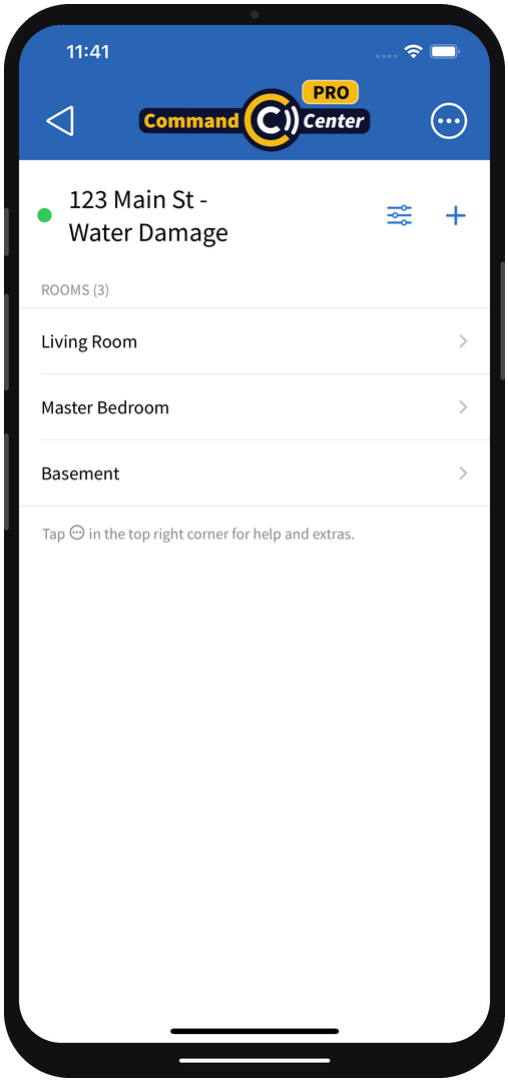

5.2 Edit Room Names


1. Select the room, then tap the filter icon .
2. Tap **Edit** and rename the Room.
3. Tap **Save**.

© 2026 Legend Brands

5.3 Add Devices to a Job

> **Note:** The device must already be registered to your company account before it can be added to a room – see Register devices. If a device doesn't appear in the list, register it first.

1. Select the job to which you want to add a device.
2. Select the named room and then tap + to add a device to that room.

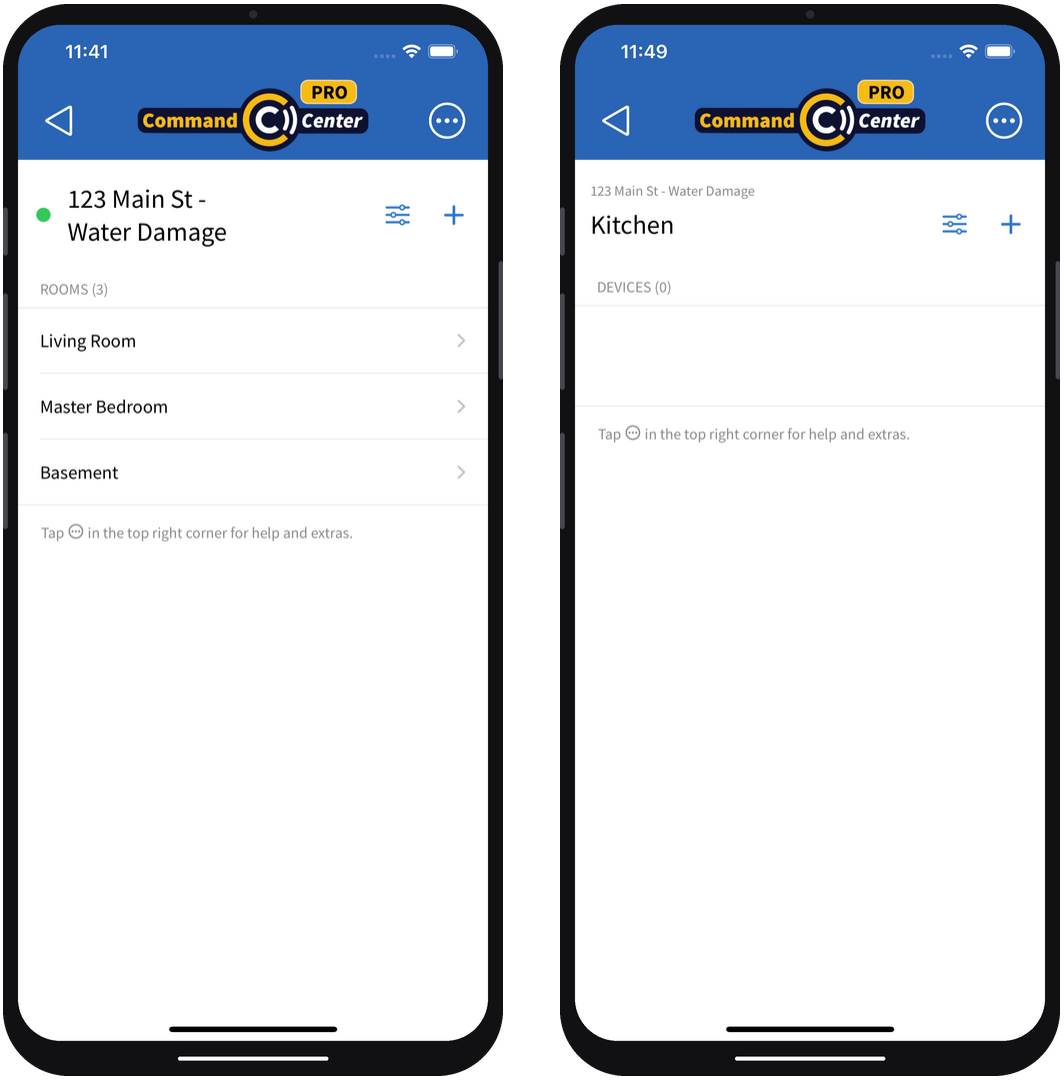

3. Tap the registered device with the serial number that matches the desired device to add it to the room.
4. The device is now assigned to the job.
5. Reset the job hours on the device.

© 2026 Legend Brands


5.4 Link a BLE Protimeter

1. Go to the job to which you want to add the device.
2. Select the room.
3. Tap the + sign at the top right of the screen.
4. Select the BLE device you want to add.
5. Select the parent device (Command Hub-equipped dehumidifier or air scrubber).

5.5 Connect Devices to Wi-Fi


Connect devices to Wi-Fi while at the job site:

1. Wi-Fi signal at the job site must remain stable to maintain the Wi-Fi remote connection. If uncertain about the stability of jobsite Wi-Fi, connect a mobile hotspot as the Wi-Fi source and leave it onsite during the job.
2. Touch the Command Hub screen on the device.
3. Tap the icon next to the correct device name and serial number.

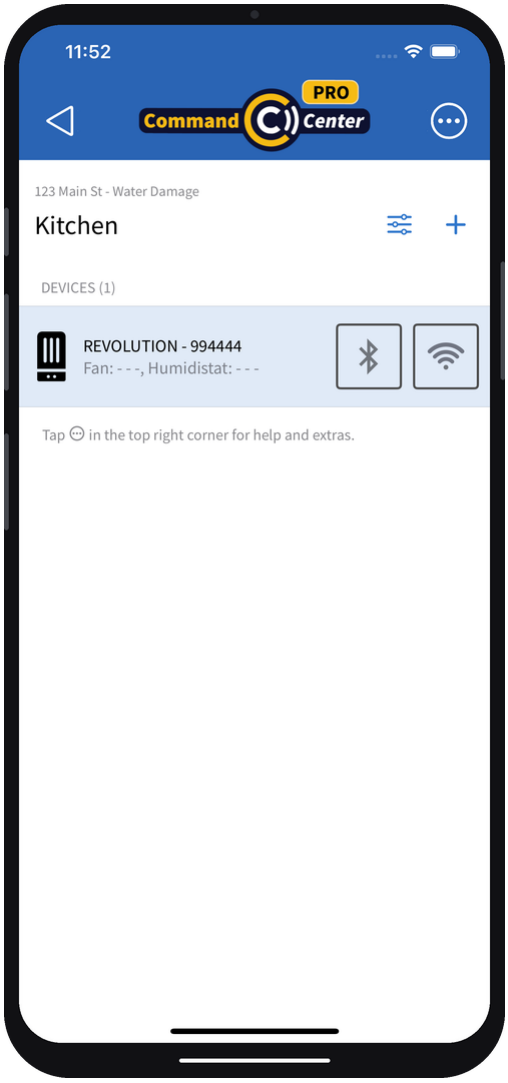


© 2026 Legend Brands

4. Tap the Settings icon .

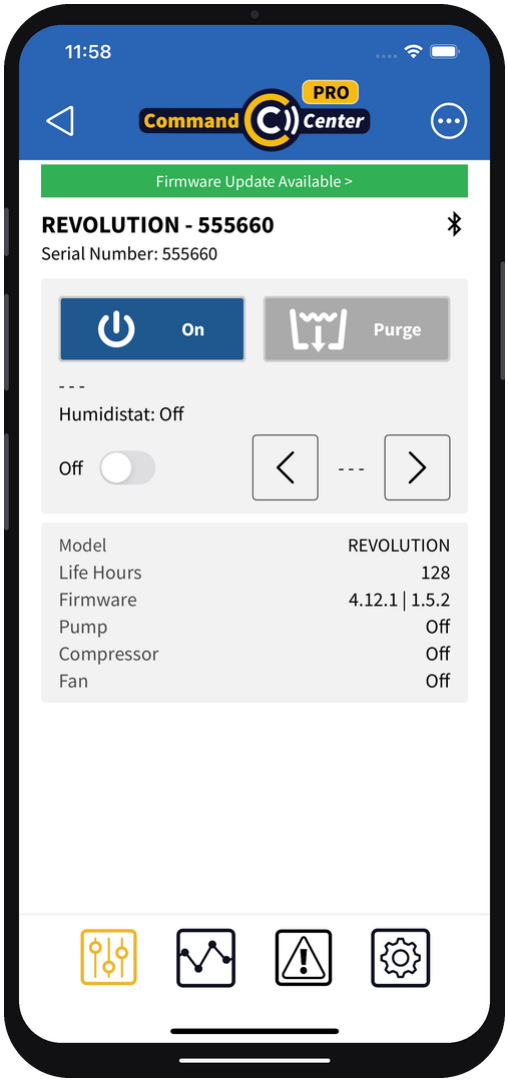


© 2026 Legend Brands

5. Scroll down and tap **Wi-Fi Credentials.**

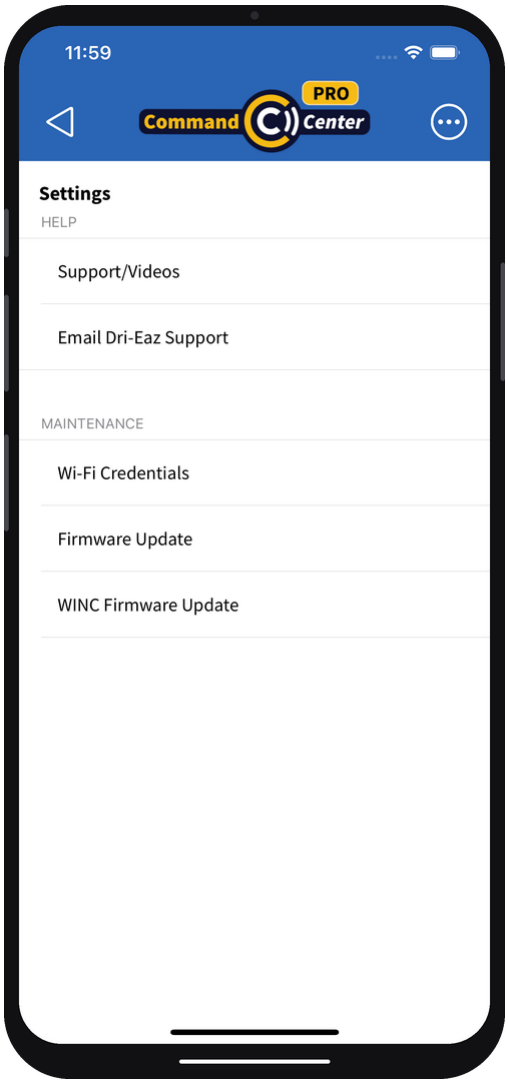

© 2026 Legend Brands


6. Tap **Networks** and choose the Wi-Fi network you wish to connect with. If your phone is on a network you've assigned before, its name and password are filled in for you.

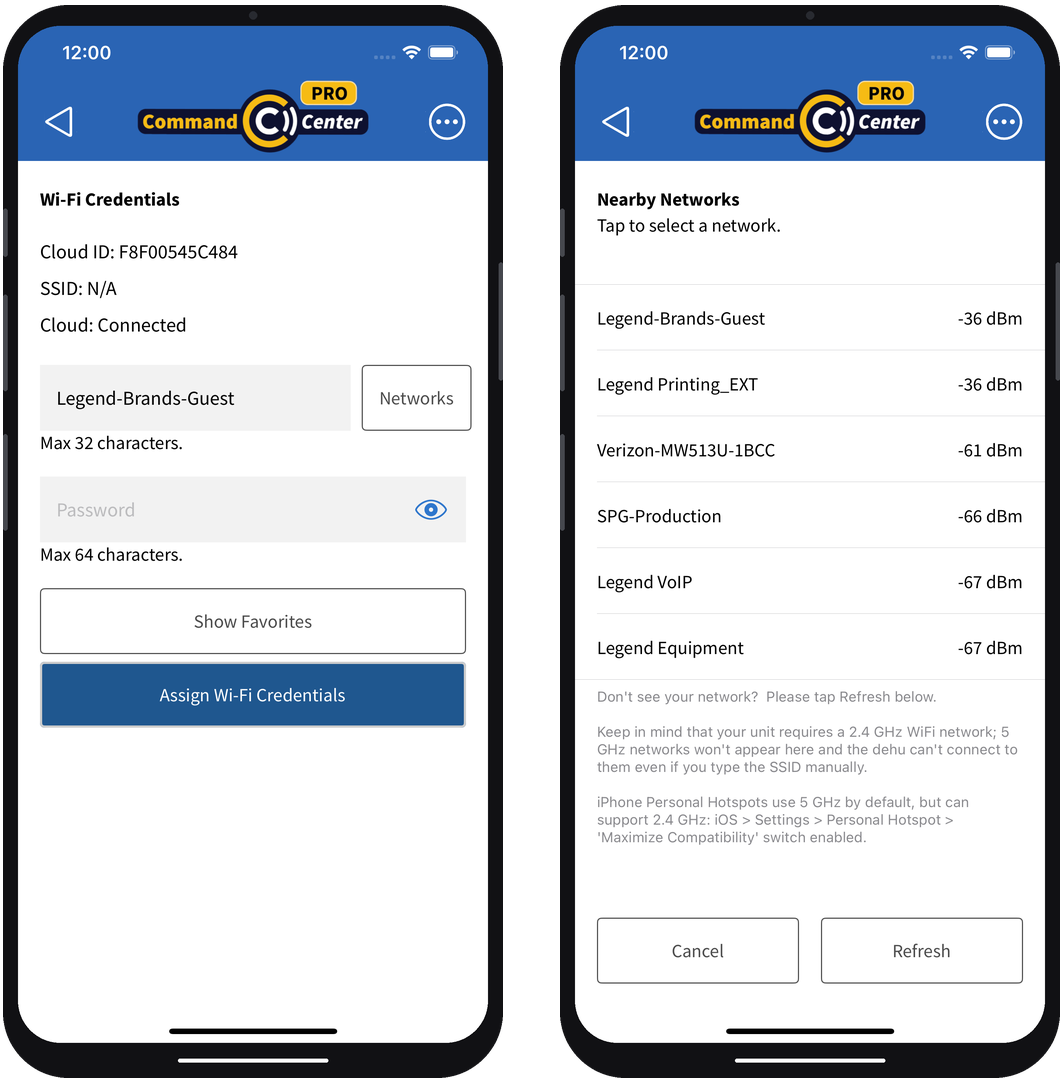

7. Enter the network password if required.
8. Tap **Assign Wi-Fi Credentials**. The network is also saved to your favorites so you can reuse it on other devices.
9. Tap the back arrow to return to the device screen. Tap it again to disconnect from the device's Bluetooth. When asked "Do you want to disconnect?", tap **Disconnect**.

© 2026 Legend Brands

10. The Wi-Fi icon next to the selected device will change from red to green when the device is connected to Wi-Fi.

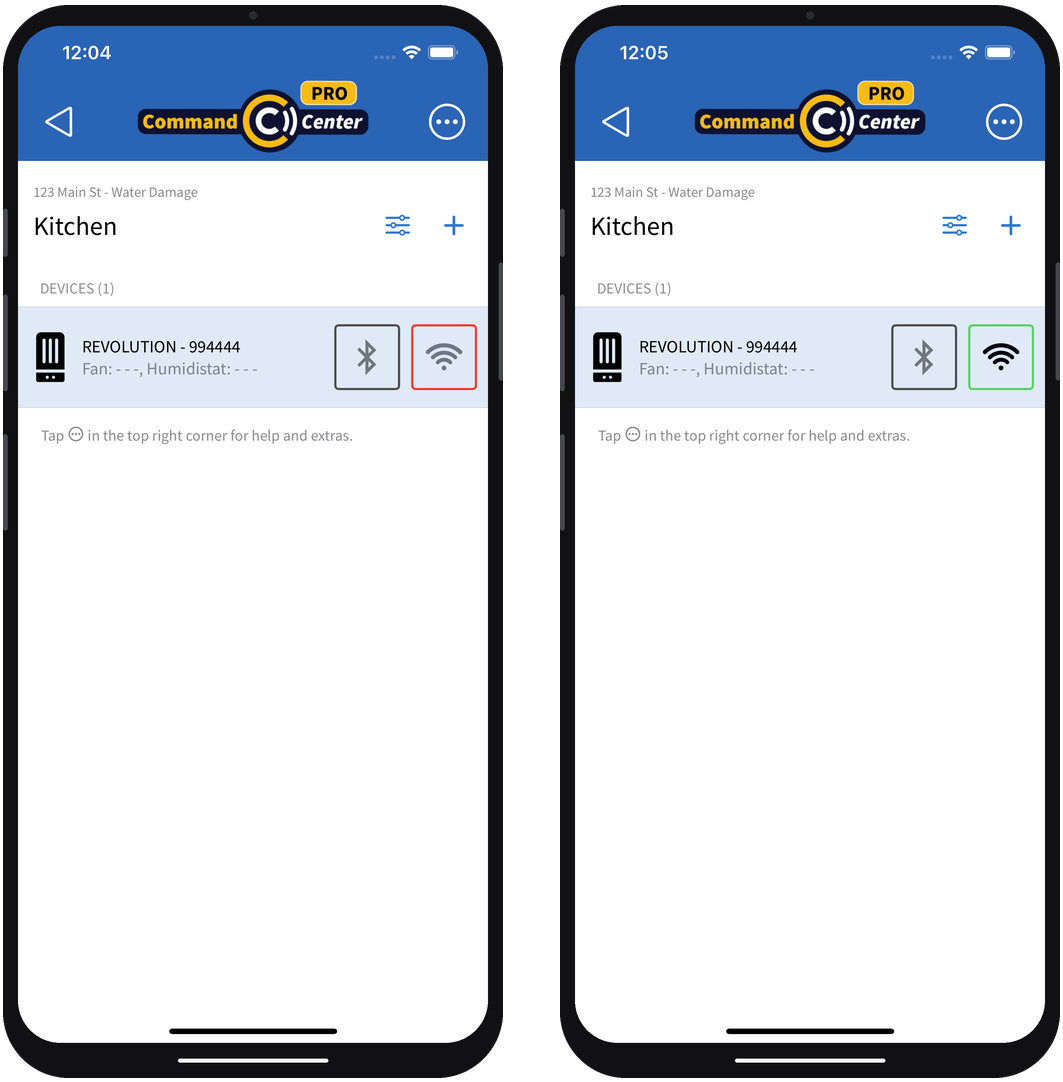


11. Tap the icon to confirm you can monitor and control the device via Wi-Fi (see Remote monitoring).

© 2026 Legend Brands


6 Quick Start, Complete and Delete Jobs with App

1. Open the CC Pro app.
2. Tap **Jobs** at the top.
3. Select a Job.
4. To **Start** a Job, swipe right on the selected job, tap the green button, and tap **Start** when prompted.

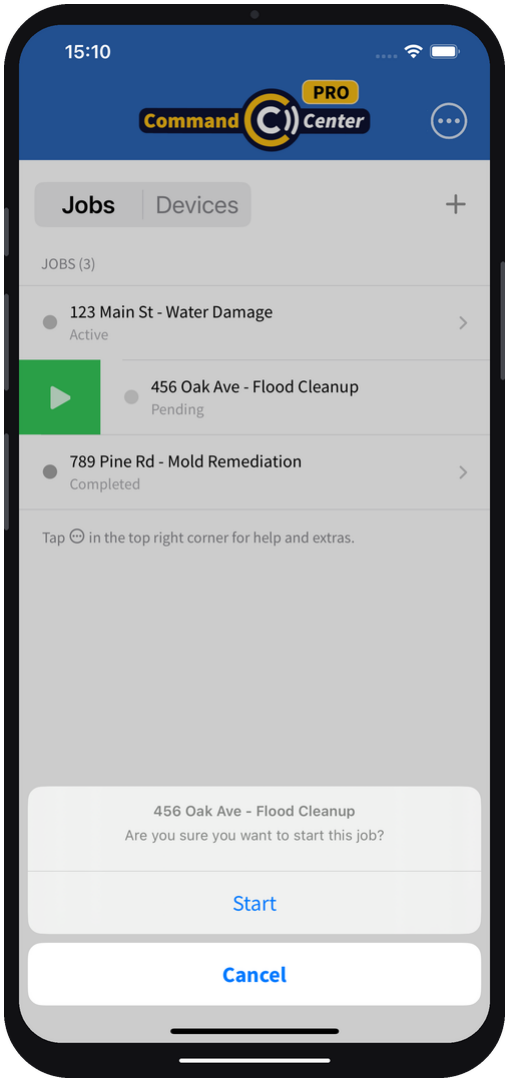


© 2026 Legend Brands

5. To **Complete** a Job, swipe right on the selected active job, tap the red button, and tap **Complete** when prompted.

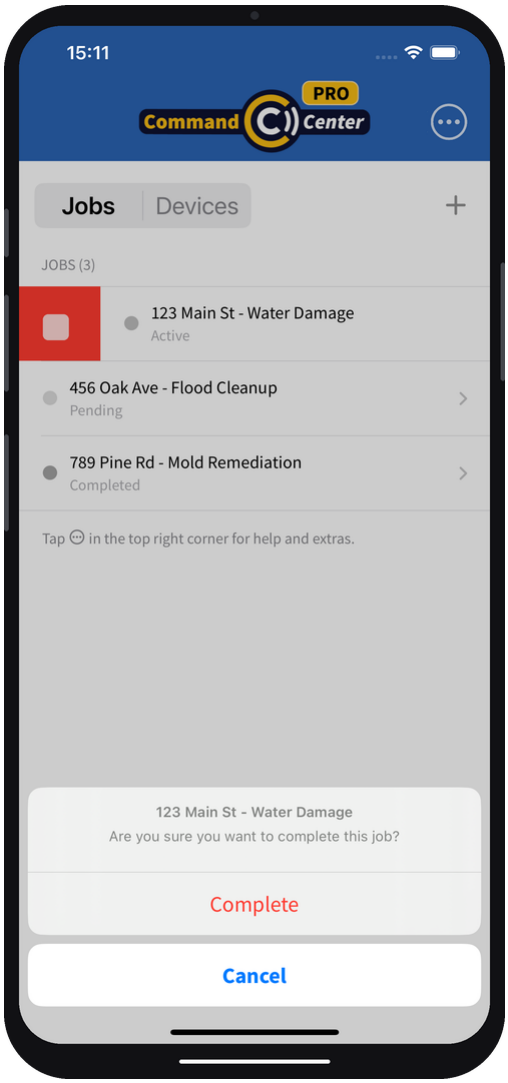

© 2026 Legend Brands

6. To **Delete** a Job, swipe left on the selected job, tap the red trash can button, then tap **Delete** when prompted.

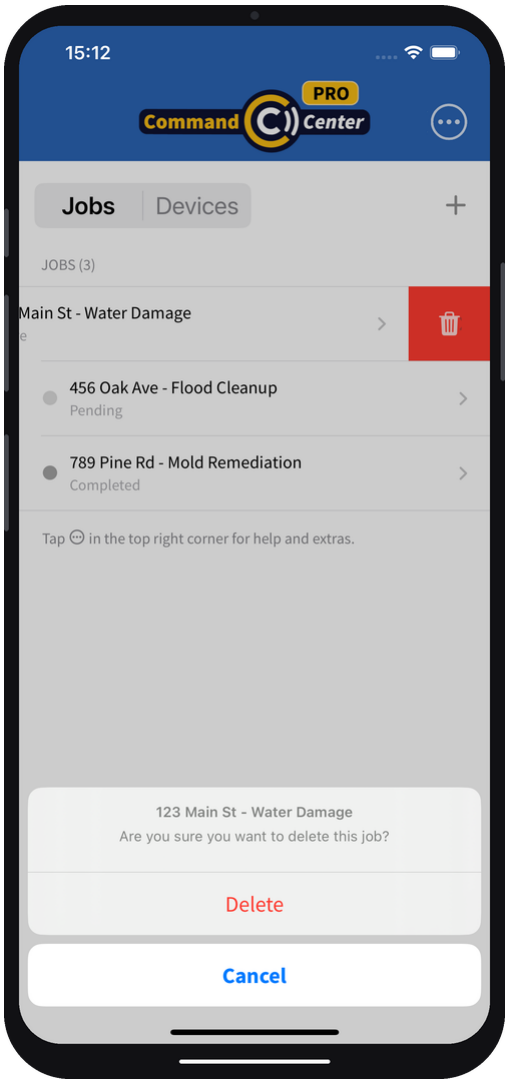

© 2026 Legend Brands

7 Remote Monitoring with App

Once a device is connected to Wi-Fi (see "Connect devices to Wi-Fi" in Add a quick job), you can monitor and control it from anywhere. Open it from a job's room, or straight from the Devices tab – a device doesn't need to be on a job.

7.1 Open a Device from a Job

1. Open the CC Pro app.
2. Select a Job, then select a Room.
3. Tap the Wi-Fi icon next to the device you want to monitor/control.


7.2 Open a Device from the Devices Tab

1. Tap **Devices** at the top of the app.
2. Check the Wi-Fi icon in the device's row:
   - **Green** – the device is reporting to the cloud and can be opened.
   - **Red** – the device is registered but isn't reporting to the cloud right now, so it can't be opened. Check that it's powered on and connected to Wi-Fi (see "Connect devices to Wi-Fi" in Add a quick job).

Protimeters don't show a Wi-Fi icon.

© 2026 Legend Brands

3. Tap the green Wi-Fi icon to open the device.

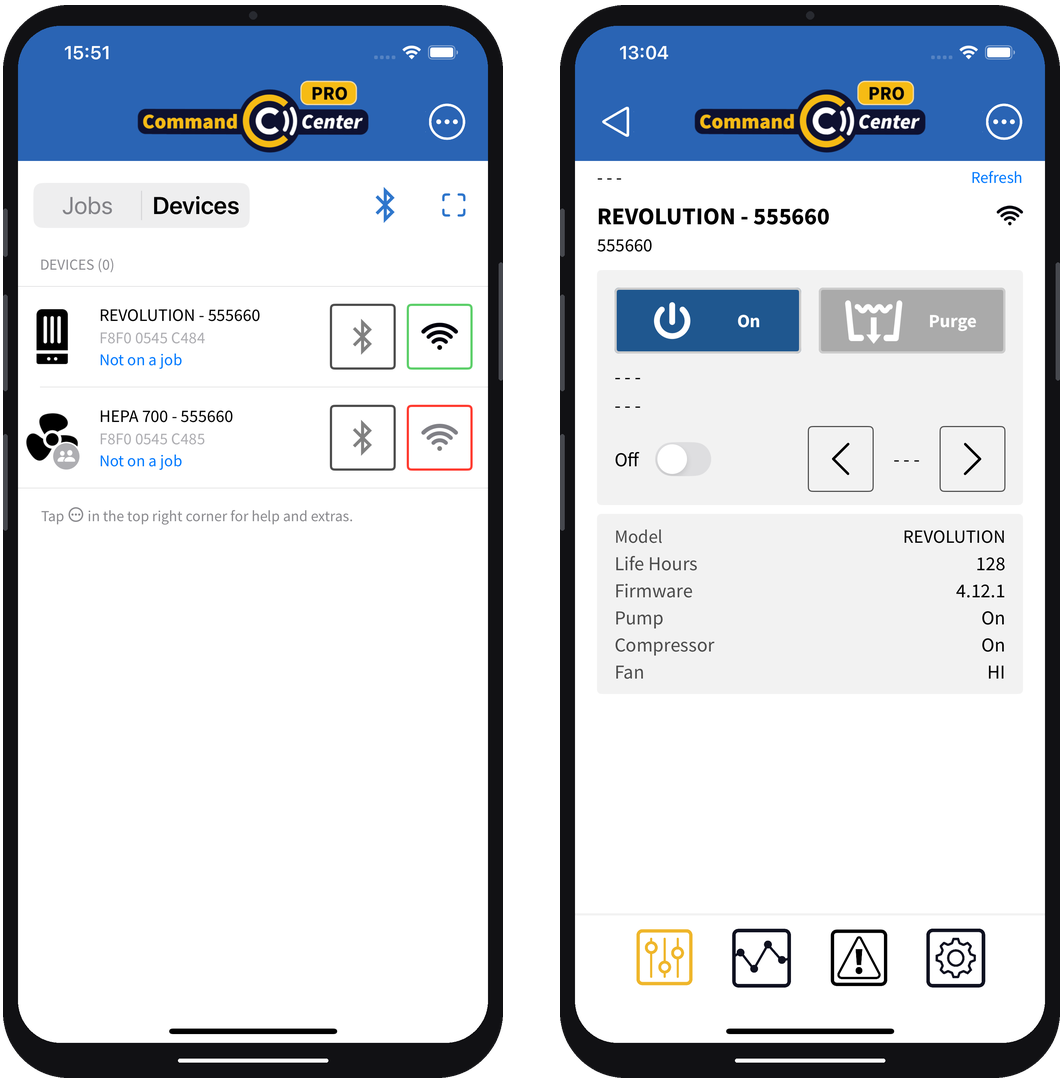



© 2026 Legend Brands

7.3 Use the Device Screen

The app screen goes dark while the app retrieves the latest data. The device screen then uses four tabs along the bottom: **Controls**, **Reports**, **Events**, and **Settings**.

Event notifications about errors (e.g. power outages) appear in the Events tab, but are not currently available via Wi-Fi. Settings are also limited over Wi-Fi – connect via Bluetooth to update firmware.

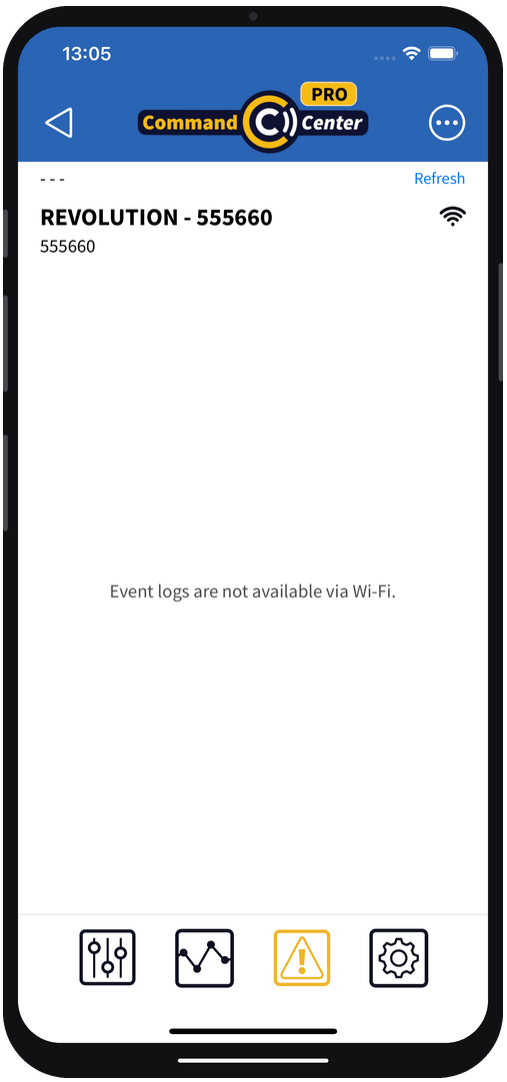

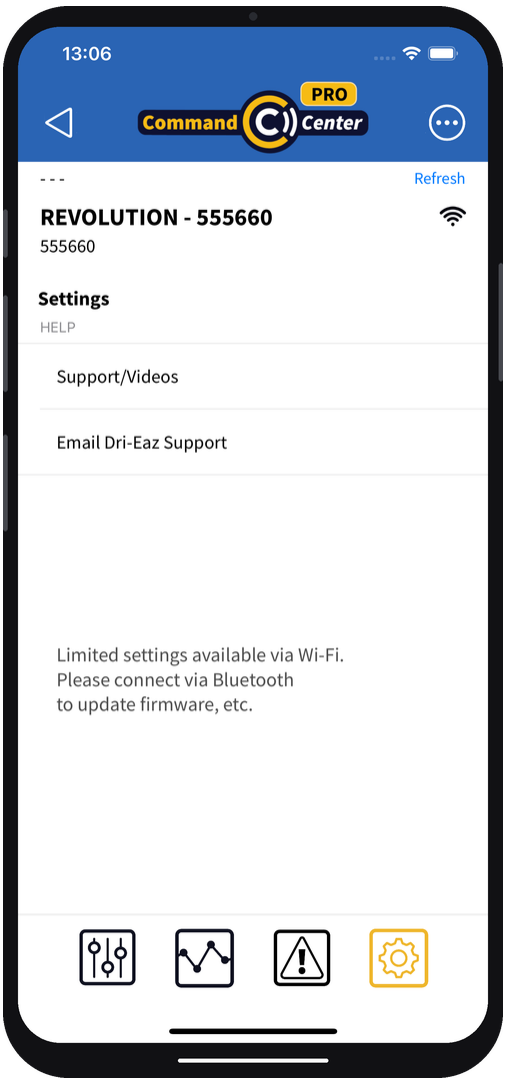

© 2026 Legend Brands

Dehumidifiers: Controls Tab


Tap the Controls tab .


- **Control:** power on/off, manually purge pump, activate Humidistat and set/adjust target % relative humidity (only for ongoing moisture control – does not provide maximum dehumidification).
- **View:** on/off status, humidistat status and % RH setpoint, pump purging activity, device model, serial number, job and life hours, firmware version, compressor and fan status.

Dehumidifiers: Reports Tab

Tap the Reports tab .

- **Control:** reset job hours (should be done only at the beginning of a job).
- **View:** inlet/outlet temperature and % relative humidity, difference in inlet and outlet GPP (grain depression – indicates effectiveness of the dehumidifier), job hours, humidity/drying trends graphed over time (30 data points).

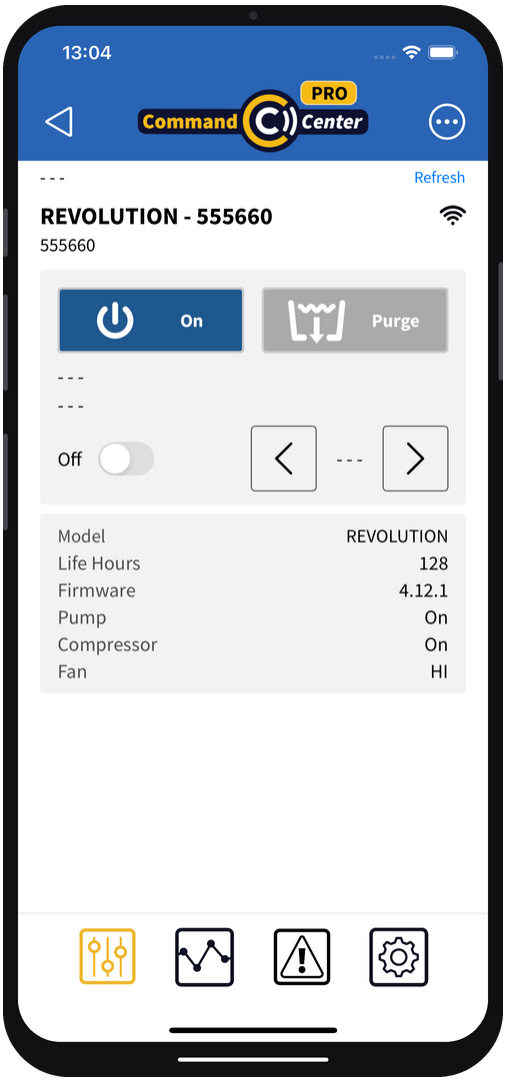

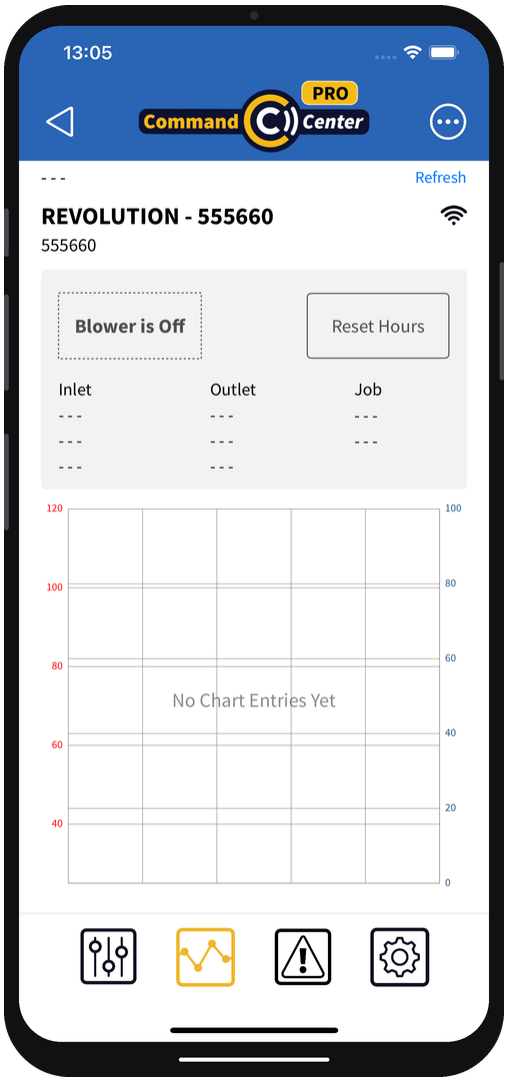


© 2026 Legend Brands

Air Scrubbers: Controls Tab

Tap the Controls tab .

- **Control:** power on/off, adjust fan speed, reset job hours (if not already reset at the beginning of the job).
- **View:** on/off status, HEPA filter status, fan speed, job hours, device model, serial number and firmware version.

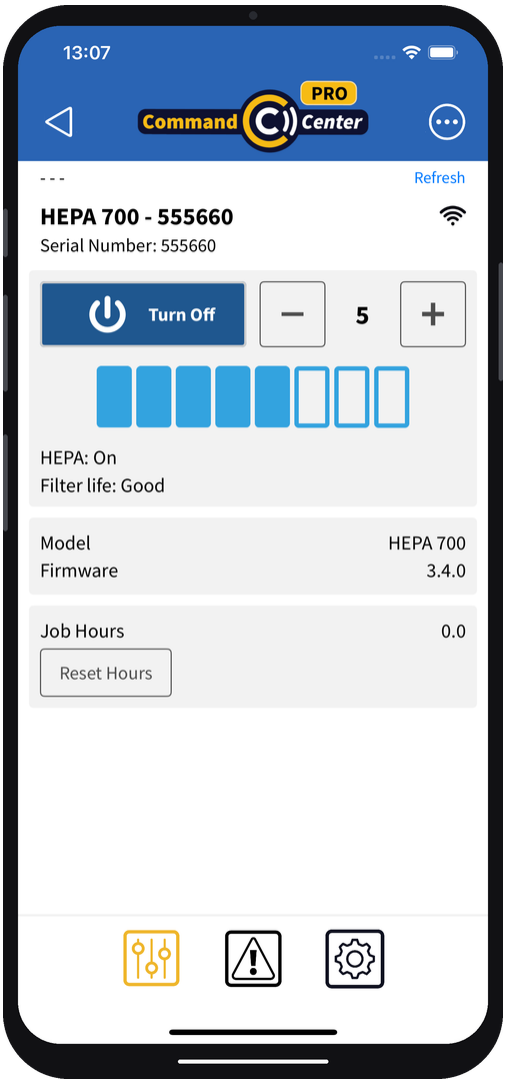

© 2026 Legend Brands

8 App Tips and Help

Go to legendbrands.com/command-center-apps for videos, FAQs and more.

© 2026 Legend Brands